



City of Coquitlam

# **Contract Documents 81456**

## **Culvert Replacement at Dewdney Trunk**



# ***Table of Contents***

**Contract No. 81456**

**Culvert Replacement at Dewdney Trunk**

**Project Construction Documents**

**Table of Contents**

The complete **Project Construction Documents** consist of the following parts:

<b>1. Standard Documents – supplied</b>	<b>Page</b>
Table of Contents .....	TC 1 to TC 2
Invitation to Tender .....	IN 1 to IN 3
Instruction to Tenderers	
▪ Table of Contents.....	IT 1
▪ Instructions to Tenderers .....	IT 2 to IT 12
Form of Tender, including	
▪ Form of Tender Summary .....	FT 1
▪ Form of Tender .....	FT 2 to FT 5
▪ Appendix 1 – Schedule of Quantities and Unit Prices.....	FT 6
▪ Appendix 2 – Preliminary Construction Schedule .....	FT 7
▪ Appendix 3 – Experience of Superintendent.....	FT 8
▪ Appendix 4 – Comparable Work Experience.....	FT 9
▪ Appendix 5 – Subcontractors .....	FT 10
▪ Appendix 6 – Bid Bond.....	FT 11
▪ Appendix 7 – Certificate of Compliance for Contract Insurance .....	FT 12
Agreement between Owner and Contractor .....	AGT 1 to AGT 4
Schedule 1 – Schedule of Contract Documents.....	AGT 5
Schedule 2 – List of Drawings .....	AGT 6
Supplementary General Conditions – Table of Contents.....	SGC 1 to SGC 2
▪ Supplementary General Conditions, including.....	SGC 3 to SGC 24
▪ Appendices:	
▪ Appendix I Performance Bond .....	SGC 18 to SGC 19
▪ Appendix II labour and Material Payment Bond .....	SGC 20 to SGC 22
▪ Appendix III Certificate of Insurance.....	SGC 23
▪ Appendix IV Prime Contractor Designation .....	SGC 24

## Table of Contents

Supplementary Contract Specifications .....	SS 1 to SS 26
Appendix A – Traffic Management Detail Specifications .....	TMP 1 to TMP 8
Appendix B – Construction Mitigation Plan .....	CMP 1 to CMP 2
Contract Drawings .....	Under Separate Cover

## 2. Standard Documents – not supplied

- i) (available in the “MMCD – General Conditions, Specifications and Standard Detail Drawings”)
  - Instructions to Tenderers
  - General Conditions
    - Schedule 17.5.3 – Letter Agreement with Referee
    - Flow Chart – Changes and Extra Work
    - Flow Chart – Dispute Resolution
  - Specifications
  - Standard Detail Drawings
- ii) City of Coquitlam Supplementary Specifications for Contract Documents

# ***Invitation to Tender***



## INVITATION TO TENDER

DATE OF ISSUE: **May 16, 2024**

*We acknowledge with gratitude and respect that the name Coquitlam was derived from the hən̓q̓əmi̓n̓ə́h word kʷikwə́ləm (kwee-kwuh-tlum) meaning "Red Fish Up the River". The City is honoured to be located on the kʷikwə́ləm (Kwikwetlem) traditional and ancestral lands, including those parts that were historically shared with the s̓q̓əcíyaʔ təməxʷ (Katzie), and other Coast Salish Peoples.*

### **Tender No.81456**

### **Culvert Replacement at Dewdney Trunk**

The City of Coquitlam invites tenders for **Contract 81456 – Culvert Replacement at Dewdney Trunk**, generally consisting of the following, but not limited to:

- C76 Class V 1200mm concrete pipe - Approx. 30metres
- Storm Manhole - 2400 diameter
- Precast Concrete Headwall Max Series – 2.1m width x 2.2m height
- Other miscellaneous and incidental works as further described in the Contract Documents.

Tender Documents and Drawings are available for downloading from the City of Coquitlam website: [www.coquitlam.ca/BidOpportunities](http://www.coquitlam.ca/BidOpportunities)

Printing of Tender documents and drawings is the sole responsibility of the Tenderers.

Tenders submitted must be accompanied by a copy of the original specified 10% Bid Bond and will be received:

**On or Before 2:00 pm local time**

**Thursday, June 6, 2024**

("Closing Date and Time")

## **Addenda**

**Tenderers are required to check the City's website for any updated information, issued before the Closing Date at: [www.coquitlam.ca/BidOpportunities](http://www.coquitlam.ca/BidOpportunities). Where in its sole discretion it considers it to be necessary or desirable, the City may issue Addenda to amend any portion of the Contract Documents.**

Any changes to the Tender documentation will be issued by means of written Addenda and posted on the City's website and will form part of the Tender. No amendment of any kind to the Tender is effective unless it is posted in a formal written Addendum on the City website. Upon submitting a Tender, Tenderers will be deemed to have received notice of all Addenda that are posted on the City's website and deemed to have considered the information for inclusion in the Tender submitted.

The City does not retain a bidder's list or bidder's registry. Tenderers are encouraged to register as plan takers and may view the Tender Documents and Drawings by contacting the Vancouver Regional Construction Association (VRCA), website: [www.my.vrca.ca](http://www.my.vrca.ca), ph: 604-294-3766, or email at [vrca@vrca.ca](mailto:vrca@vrca.ca), quoting the Coquitlam Tender Reference Number.

Should there be any discrepancy in the documentation provided, the City's original file copy shall prevail.

Tenders shall remain open for acceptance for 60 days following the submission Closing Date.

The City reserves the right to accept or reject any or all Tenders and the lowest or any Tender may not necessarily be accepted. The City also reserves the right to cancel any request for Tender at any time without recourse by the Tenderer.

The City, prior to award of any Tender, may negotiate with the Tenderer presenting the lowest price compliant Tender, for changes in the Work, materials, specifications or conditions without having any duty or obligation to advise any other Tenderers or to allow them to modify their Tenders, and the City will have no liability to any Tenderer as a result of such negotiations or modifications.

The City will not be responsible for any costs incurred by the Tenderer in preparing the Tender.

Procurement of goods and services is conducted in accordance with Chapter 5 of the Canadian Free Trade Agreement (CFTA) and the New West Partnership Trade Agreement (NWPTA).

M. Pain  
Procurement Manager



# ***Instructions to Tenderers***

**Tender 81456**

**Culvert Replacement at Dewdney Trunk**

**INSTRUCTIONS TO TENDERERS**

<b>TABLE OF CONTENTS</b>	<b>Page</b>
<b>1 Introduction.....</b>	<b>IT 2</b>
<b>2 Tender Documents.....</b>	<b>IT 2 to 3</b>
<b>3 Submission of Tenders.....</b>	<b>IT 3 to 4</b>
<b>4 Additional Instructions to Tenderers.....</b>	<b>IT 4 to 5</b>
<b>5 Tender Requirements .....</b>	<b>IT 5 to 7</b>
<b>6 Qualifications, Modifications, Alternative Tender .....</b>	<b>IT 7</b>
<b>7 Approved Equals.....</b>	<b>IT 7</b>
<b>8 Inspection of the Place of the Work.....</b>	<b>IT 7 to 8</b>
<b>9 Interpretation of Contract Documents .....</b>	<b>IT 8</b>
<b>10 Prices .....</b>	<b>IT 8</b>
<b>11 Taxes.....</b>	<b>IT 9</b>
<b>12 Amendment of Tenders .....</b>	<b>IT 9</b>
<b>13 Duration of Tenders .....</b>	<b>IT 10</b>
<b>14 Qualifications of Tenders .....</b>	<b>IT 10</b>
<b>15 Award.....</b>	<b>IT 10 to 12</b>
<b>16 Subcontractors .....</b>	<b>IT 12</b>
<b>17 Optional Work.....</b>	<b>IT 12</b>

## INSTRUCTIONS TO TENDERERS

(FOR USE WHEN UNIT PRICES FORM THE BASIS OF PAYMENT - TO BE USED ONLY WITH THE GENERAL CONDITIONS AND OTHER STANDARD DOCUMENTS OF THE UNIT PRICE MASTER MUNICIPAL CONSTRUCTION DOCUMENTS.)

### The City of Coquitlam

*Contract:*       **Culvert Replacement at Dewdney Trunk**

*Reference No.*   **81456**

- |            |                         |            |  |
|------------|-------------------------|------------|--|
| <b>1.0</b> | <b>Introduction</b>     | <b>1.1</b> | <p>These Instructions apply to and govern the preparation of tenders for this <i>Contract</i>. The <i>Contract</i> is generally for the following work:</p> <ul style="list-style-type: none"><li>• C76 Class V 1200mm concrete pipe - Approx. 30metres</li><li>• Storm Manhole - 2400 diameter</li><li>• Precast Concrete Headwall Max Series – 2.1m width x 2.2m height</li><li>• Other miscellaneous and incidental works as further described in the Contract Documents.</li></ul>   |
|            |                         | <b>1.2</b> | <p>All inquiries regarding this Tender are to be submitted in writing referencing the <b>Tender Name and Number</b> sent to:</p> <p><b>E-mail</b>       <a href="mailto:bid@coquitlam.ca">bid@coquitlam.ca</a></p> <p>The deadline for inquiries is <b>2:00 PM</b> local time, <b>Monday, June 3, 2024</b>.<br/><b>INQUIRIES RECEIVED AFTER THIS DATE AND TIME MAY NOT RECEIVE A RESPONSE.</b></p>   |
| <b>2.0</b> | <b>Tender Documents</b> | <b>2.1</b> | <p>The Tender Documents which a Tenderer should review to prepare a Tender consist of all of the <i>Contract Documents</i> listed in Schedule 1 entitled "Schedule of Contract Documents". Schedule 1 is attached to the Agreement which is included as part of the Tender Package. The <i>Contract Documents</i> include the drawings listed in Schedule 2 to the Agreement, entitled "<b>List of Contract Drawings</b>".</p>   |
|            |                         | <b>2.2</b> | <p><u>A portion of the Contract Documents are included by reference. Copies of these documents have not been included with the tender package.</u> These documents are the General Conditions, Specifications and Standard Detail Drawings. They are those contained in the publication entitled "Master Municipal Construction Documents - General Conditions, Specifications and Standard Detail Drawings". Refer to Schedule 1 to the Agreement or, if not specified in Schedule 1, then the applicable edition shall be the most recent edition as of the date of the <i>Tender Closing Date</i>. <u>All sections of this publication are by reference included in the Contract Documents.</u></p> |
|            |                         | <b>2.3</b> | <p>Any additional information made available to Tenderers prior to the Tender Closing Time by the Owner or representative of the Owner,</p>  |

such as geotechnical reports or as-built plans, which is not expressly included in Schedule 1 or Schedule 2 to the Agreement, is not included in the Contract Documents. Such additional information is made available only for the assistance of Tenderers who must make their own judgments about its reliability, accuracy, completeness and relevance to the *Contract*, and neither the Owner nor any representative of the Owner gives any guarantee or representation that the additional information is reliable, accurate, complete or relevant.

**3.0 Submission of  
Tenders**

3.1 Tenders must be submitted on the Tender Form provided, accompanied by a copy of the original 10% Bid Bond quoting the Tender Name and Number, and be uploaded to the City's file transfer website.

Tenders must be received on or before:

***Tender Closing Time:* 2:00 p.m. local time**

***Tender Closing Date:* June 6, 2024**

For the purpose of the Tender submission, digital copies of original documents and signatures sent electronically are accepted. Original documents are required upon request by the City.

**Instructions  
for Tender  
Submission**

3.2 **Tender submissions are to be consolidated into one (1) PDF file and uploaded electronically through QFile, the City's file transfer service accessed at website:**  
<http://qfile.coquitlam.ca/bid>

- 1. In the "Subject Field" enter: Tender Number and Name**
- 2. Add consolidated Tender file in PDF format and Appendix 1 in XLS format, and Send** (ensure your web browser remains open until you receive 2 emails from Qfile to confirm upload is complete and was sent to email: [bid@coquitlam.ca](mailto:bid@coquitlam.ca))

**Tenderers are responsible to allow for ample time to complete the submission process. For assistance, phone 604-927-3037.**

3.3 Tenders submitted shall be deemed to be received when displayed as a new email in the in-box of the above email address. The City will not be responsible for any delay or for any Tenders not received for any reason, including technological delays or issues by either party's network or email program, and the City will not be liable for any damages associated with Tenders not received.

3.4 The City reserves the right to accept late Tenders to allow for technological delays. The City also reserves the right to accept Tenders by email: [bid@coquitlam.ca](mailto:bid@coquitlam.ca).

**BIDS RECEIVED IN-PERSON, BY COURIER, OR BY FAX WILL NOT BE ACCEPTED.**

		3.5	Tenders will not be opened in public. The unevaluated results will be forwarded to participants by email.
		3.6	Tender submissions are subject to the Freedom of Information and Protection of Privacy Act and contents may be disclosed if required to do so, pursuant to the Act.
4.0	<b>Additional Instructions to Tenderers</b>	4.01	<p>.1 Proposed culvert outfalls to Pinnacle Creek, which is a fish bearing watercourse and subject to conform to all DFO regulations. Request for Project Review has already been submitted to DFO.</p> <p>.2 Environmental safeguards shall include monitoring the works by an Environmental Monitor (EM) designated by the City and as described in specifications in Appendix B – Construction Mitigation Plan.</p> <p>.3 All construction work must be completed within the fisheries window, August 1 to September 15, 2024, subject to approval by DFO.</p> <p>.4 Minimum single lane alternating traffic (SLAT) must be maintained at all times. Refer to Appendix A – Traffic Management Detail Specifications for other project requirements.</p>
	<b>Obtaining Documents</b>	4.1	<p>The following documents which are referred to and form part of the Contract Document package may be obtained as follows:</p> <ul style="list-style-type: none"><li>• Copies of the Master Municipal Construction Documents Volume II (2009), General Conditions, Specifications and Standard Detail Drawings are available separately from:  Support Services Unlimited Suite 102 211 Columbia Street Vancouver, B.C. V6A 2R5 Tel: 604-681-0295 Fax: 604-305-0424</li><li>• Copies of the City of Coquitlam Supplementary Specifications and Detailed Drawings to the MMCD 2009 Edition are available for viewing and downloading off the City of Coquitlam website: <a href="#">Supplementary Specifications and Detailed Drawings to MMCD</a></li></ul>
	<b>Test Excavations</b>	4.2	Prior to the excavation of test holes on road allowances or privately owned property the Tenderer shall obtain permission from the Municipality or Owner of the property and comply with their requirements for restoration of disturbed surfaces and utilities. Failure to comply with Municipal by-laws restricting this practice may result in prosecution of the offending party.
	<b>Business License</b>	4.3	The successful Tenderer shall provide evidence of a City of Coquitlam Business License or Tri-Cities Inter-Municipal Business License prior to commencement of work or supply of materials. For more information, contact Business License Division Ph: 604-927-3085 or apply online at website: <a href="#">City of Coquitlam Business License</a>

	<b>No Claim</b>	4.4	Except as expressly and specifically permitted in these Instructions to Tenderers, no Tenderer shall have any claim for any compensation of any kind whatsoever, as a result of participating in this Tender, including accepting a non-compliant bid and by submitting a Tender, each Tenderer shall be deemed to have agreed that it has no claim.
	<b>No Cost</b>	4.5	The City will not under any circumstances be responsible for any costs incurred by the Tenderer in preparing the Tender.
	<b>Right to Accept or Reject any Tender</b>	4.6	<p>The City reserves the right to accept or reject any or all Tenders and the lowest or any Tender may not necessarily be accepted. In its sole discretion, the City may reject or retain for its consideration, tenders which are nonconforming because they do not contain the content or form required by the instructions to tenderers or for failure to comply with the process for submission set out in these instructions to tenderers.</p> <p>The City specifically reserves the right to reject all Tenders if none is considered to be satisfactory and, in that event, at its option, to call for additional Tenders.</p>
	<b>Negotiation</b>	4.7	The City, prior to award of any Tender, may negotiate with the Tenderer presenting the lowest price compliant Tender, for changes in the Work, materials, specifications or conditions without having any duty or obligation to advise any other Tenderers or to allow them to modify their Tenders, and the City will have no liability to any Tenderer as a result of such negotiations or modifications.
	<b>Cancellation of Tender</b>	4.8	The City reserves the right to cancel any request for Tender at any time without recourse by the Tenderer. The City has the right to not award this work for any reason including choosing to complete the work with the City's own forces.
	<b>Conflict of Interest</b>	4.9	Tenderers shall disclose any actual or potential conflicts of interest and existing business relationships it may have with the City, their elected or appointed officials or employees.
	<b>Collusion</b>	4.10	Tenderers will not discuss or communicate with one another in regards to the preparation of their Tenders. Each Tenderer will ensure that its participation in the Tender process and that of its team members is conducted without collusion or fraud. Failure to comply with this requirement may lead to disqualification without further notice or warning.
	<b>Instruction to Tenderers – Part II</b>		Delete Instructions to Tenderers – Part II Contained in the Edition of the Publication “Master Municipal Construction Documents 2009” and replace with the following:
	<b>5.0 Tender Requirements</b>	5.1	<p>A tender should be on the Form of Tender as provided and be signed by the authorized signatory(s) as follows:</p> <p>5.1.1 if the tenderer is a partnership or joint venture then the name of the partnership or joint venturer</p>

- should be included, and each partner or joint venturer should sign personally; if a partner of joint venture is a corporation then such corporation should sign as indicated in paragraph 5.1.3 below; and
- 5.1.2 if the tenderer is a corporation then the full name of the corporation should be included, together with the names and signatures of authorized signatories.
  - 5.1.3 For the purpose of the Tender submission, digital copies of original documents and electronic signatures are accepted. Original documents are required upon request by the City.
- 5.2 A tender must be accompanied by tender security ("*Bid Security*") in the form of:
- 5.2.1 a copy (digital or Electronic copy is acceptable) of the original bid bond in an amount equal to 10% of the Tender Price, issued by a surety licensed to carry on the business of suretyship in British Columbia in a form reasonably satisfactory to the *Owner*;
- 5.3 Tenderer should be competent and capable of performing the various items of work. Tenderer shall complete the following statement sheets appended to the Form of Tender:
- 5.3.1 Appendix 1 – the Schedule of Quantities and Prices;
  - 5.3.2 Appendix 2 – a "*Preliminary Construction Schedule*", generally in the form attached as Appendix 2 to the Form of Tender, and showing *Substantial Performance* by the date or within the duration, shown in paragraph 2.2 of the Form of Tender.
  - 5.3.3 Appendix 3 – name and brief description of the previous experience of the *Superintendent* the tenderer will use for the *Work*;
  - 5.3.4 Appendix 4 – a list of previous comparable work, including a brief description of that work, approximate contract value, and references (with phone numbers);
  - 5.3.5 Appendix 5 – a complete list of all subcontractors, if any, that the tenderer will use for the *Work* including full names.; and
  - 5.3.6 Appendix 7 – is provided for information only, to indicate the Contract Insurance is to be submitted by the successful Tenderer upon Notice of Award.

- 5.4 The successful tenderer will, within 15 *Days* of receipt of the written *Notice of Award*, be required to deliver to the *Owner* the items listed in FT 5.1.1, including a Performance Bond and a Labour and Material Payment Bond as described in FT 5.1.1(a), failing which the provisions of FT 6.1 will apply.
- 6.0 Qualifications, Modifications, Alternative Tenders**
- 6.1 Tenders which contain qualifications, or omissions, so as to make comparison which other tenders difficult, may be rejected by the *Owner*.
- 6.2 A tenderer may, at the tenderer's election, submit an alternative tender ("*Alternative Tender*") which varies the materials, products, designs or equipment by the *Owner as Approved Equals* as the case may be, but an *Alternative Tender* must be in addition to, and not in substitution for a tender which conforms to the requirements of the *Contract Documents*.
- 6.3 The only *Alternative Tender* that the *Owner* may accept is an *Alternative Tender* submitted by that tenderer whose conforming tender, submitted as required by paragraph 6.2 of these Instructions to Tenderers, would have been accepted by the *Owners* in the preference to other conforming tenders, if no *Alternative Tenders* had been invited.
- 7.0 Approved Equals**
- 7.1 Prior to the *Tender Closing Time and Date*, a tenderer may request the *Owner* to approve materials, products, or equipment ("*Approved Equal*") to be included in a tender in substitution for items indicated in the Contract Documents.
- 7.2 Applications for an *Approved Equal* must be in writing, and supported by appropriate supporting information, data, specifications, and documentation.
- 7.3 If the *Owner* decides in its discretion to accept an *Approved Equal*, then the *Owner* will issue an addendum to all tenderers.
- 7.4 The *Owner* is not obligated to review or accept an application for an *Approved Equal*.
- 8.0 Inspection of the Place of the Work**
- 8.1 All tenderers, either personally or through a representative, are responsible to examine the *Place of the Work* before submitting a tender. A tenderer has full responsibility to be familiar with and make allowance in the tender for all conditions at the *Place of the Work* that might affect the tender, including any information regarding subsurface soil conditions made available by the *Owner*, the location of the *Work*, local conditions, topographical soil conditions, weather and access. Unless otherwise specified in the *Contract Documents*, a tenderer is not required to do subsurface investigations. By submitting a tender, a tenderer represents that the tenderer has examined the *Place of the Work*, or specifically elected not to. No additional payments or time extensions shall be claimable or due because of difficulties relating to conditions at the



*Place of the Work* which were reasonably foreseeable by a contractor qualified to undertake the *Work*.

- 8.2 Tenderers are referred to GC 11.2.1 regarding **Concealed or Unknown Conditions**.
- 9.0 Interpretation of Contract Documents**
- 9.1 If a tenderer is in doubt as to the correct meaning of any provision of the *Contract Documents*, the tenderer may request clarification as instructed in paragraph 1.2 of the Instructions to Tenderers.
- 9.2 If a tenderer discovers any contradictions or inconsistencies in the *Contract Documents* or its provisions, or any discrepancies between a provision of the *Contract Documents* and conditions at the *Place of the Work as* observed in an examination under paragraph 8 of the person named in paragraph 1.2 of the Instructions to Tenderers.
- 9.3 If the *Owner* considers it necessary, the *Owner* may issue written addenda to provide clarification (s) of the *Contract Documents*.
- 9.4 No oral interpretation or representations from the *Owner* or any representative of the *Owner* will affect, alter, or amend any provision of the *Contract Documents*.
- 10.0 Prices**
- 10.1 The Tendered Price will represent the entire cost excluding *GST* to the *Owner* of the complete *Work* based on the estimated quantities in the *Schedule of Quantities and Prices* of the Form of Tender. Notwithstanding the generalities of the above, tenderers shall include in the tendered prices (including unit prices, lump sum prices, or other forms of pricing) sufficient amounts to cover:
- 10.1.1 the costs of all labour, equipment and material included in or required for the *Work*, including all items which, whole not specifically listed in the *Schedule of Quantities and Prices*, are included in the *Work* specifically or by necessary inference from the *Contract Documents*;
- 10.1.2 all assessments payable with respect to labour as required by any statutory scheme such as unemployment insurance, holiday pay, insurance, CPP and all employee benefits and the Workers Compensation Act;
- 10.1.3 all overhead costs, including head office and on-site overhead costs, and all amounts for the *Contractor's* profit.
- 10.2 The tendered prices and all subcontracts must allow for compliance with all applicable laws regarding trade or other qualifications of employees performing the *Work*, and payment of appropriate wages for labour included in or required for the *Work*.

**11.0 Taxes**

11.1 The tendered prices shall cover all taxes and assessments of any kind payable with respect to the *Work*, but shall not include *GST*. *GST* shall be listed as a separate line item as required by GC 19.3.

**12.0 Amendment of Tenders**

12.1 A tenderer may amend or revoke a tender by giving written notice, delivered by Email, to the office referred to in paragraph 3.4 of the Instructions to Tenderers at any time up until the *Tender Closing Date and Time*. An amendment or revocation that is received after the *Tender Closing Date and Time* shall not be considered and shall not affect a tender as submitted.

12.2 An amendment or revocation must be signed by an authorized signatory of the tenderer in the same manner as provided by paragraph 5.1 of these Instructions to Tenderers.

12.3 Any amendment that expressly or by inference discloses the tenderer's *Tender Price* or other material element of the tender such that, in the opinion of the *Owner*, the confidentiality of the tender is breached, will invalidate the entire tender.

12.4 An acceptable form of a tender amendment which tenderers may, but are not required to, use is as follows:

"Contract:

\_\_\_\_\_  
(TITLE OF CONTRACT)

Reference No.

\_\_\_\_\_  
(OWNER'S CONTRACT REFERENCE NO.)

TO:

\_\_\_\_\_  
(NAME OF OWNER)

We the undersigned wish to amend our tender which we submitted for the above *Contract* by deleting the following tendered prices or items from our tender:

\_\_\_\_\_  
\_\_\_\_\_

\_\_\_\_\_  
(TENDERED PRICES AND/OR TENDER ITEMS IN THE TENDER THAT ARE TO BE AMENDED)

and substituting the following revised tendered prices or items:

\_\_\_\_\_  
\_\_\_\_\_

\_\_\_\_\_  
(REVISED TENDERED PRICES OR TENDER ITEMS)

The extensions in our tender should be adjusted accordingly, and our ***Tender Price*** as set out in Appendix 1 of our submitted **Form of Tender**, and on the ***Schedule of Quantities and Prices***, increased / decreased by \$\_\_\_\_\_, excluding GST. We have not included our revised ***Tender Price*** in order to preserve the confidentiality of our tender.

Signed and delivered the \_\_\_ day of \_\_\_\_\_, 20\_\_."

- |             |                                    |      |   |
|-------------|------------------------------------|------|---|
| <b>13.0</b> | <b>Duration of Tenders</b>         | 13.1 | After the <i>Tender Closing Time</i> , a tender shall remain valid and irrevocable as set out in paragraph 5.1 of the Form of Tender.   |
| <b>14.0</b> | <b>Qualifications of Tenderers</b> | 14.1 | By submitting a tender, a tenderer is representing that it has the competence, qualifications and relevant experience required to do the <i>Work</i> .  |
| <b>15.0</b> | <b>Award</b>                       | 15.1 | <p>In exercising its discretion, the <i>Owner</i> will have regard to the information provided in the Appendices to the Form of Tender as described under IT 5.3 including the proven experience of the tenderer, and any listed subcontractors, to do the <i>Work</i>.</p> <p>Tenders received will be evaluated to provide the City with greatest value based on quality, service, price and experience. Evaluation Criteria will include but is not limited to:</p> <ol style="list-style-type: none"><li>1. Ability to meet specifications and required completion date</li><li>2. Contractor's past experience, references, reputation and compliance to specifications</li><li>3. Demonstrated successful experience on similar projects and specific equipment installation</li><li>4. Price: purchase price, maintenance costs, availability of parts and service, warranty and compatibility with existing equipment and/or conditions</li><li>5. Any other criteria, the City deems, at its sole discretion, necessary to evaluate Tenders;</li><li>6. Lowest price will not necessarily be accepted.</li></ol> |

The City may, in its absolute discretion, not award to a Tenderer if the Tenderer, or any officer or director of a corporate Tenderer, is or has been engaged, either directly or indirectly through another corporation or legal entity, in a legal action against the City and its elected and appointed officers and employees or any of them in relation to:

- a) any other contract or services; or
- b) any matter arising from the City's exercise of its powers, duties or functions under the *Local Government Act*, the *Community Charter* or any other enactments; within five years of this Tender Offer.

For purposes of this section, the words "legal action" includes, without limitation, mediation, arbitration, hearing before an administrative tribunal or lawsuit filed in any court.

Without limiting the City's sole discretion, in determining whether or not to award to a Tenderer pursuant to this clause, the City will consider such factors as whether the legal action is likely to affect the Tenderer's ability to work with the City and its employees,

agents, consultants and representatives or any of them and whether the City's past experience with the Tenderer in the matter that resulted in the legal action indicates that the City is likely to incur increased staff and legal costs or either of them in the administration of this contract if it is awarded to the Tenderer.

In the event that the lowest total Tender Price by two or more Tenderers is the same amount, the City will select a Tenderer with an overall satisfactory performance record in having completed work on previous relevant projects that are provided as references, and on City projects. Information obtained from references will not be disclosed or discussed with any Tenderer. If all references are equal, selection will be determined by a coin toss in a manner to be directed by the City.

Where only one Tender is received the City may reject such and re-tender on a selected basis.

- 15.2 The *Owner* will notify the successful tenderer in writing.
- 15.3 If there are any discrepancies in the *Schedule of Quantities and Prices* between the unit prices and the extended totals then the unit prices shall be deemed correct, and corresponding corrections shall be made to the extended totals. If a unit price or extended total has been omitted, the following shall apply:
- a) If a unit price is given but the corresponding extended total has been omitted, then the extended total shall be calculated from unit price and the estimated quantity, and inserted as the extended total;
  - b) If an extended total is given but the corresponding unit price has been omitted, then the unit price shall be calculated from the extended total and estimated quantity, and inserted as the unit price;
  - c) If both the unit price and the corresponding extended total for a tender item have been omitted, then the following test shall be applied to determine whether the tender shall be rejected as incomplete:
    - (i) the highest of the unit prices tendered by other tenderers for that tender item shall be used as the test unit price, and the corresponding test extended total shall be calculated from the test unit price and the estimated quantity;
    - (ii) if the test extended total for the tender item exceeds 1% of the revised total *Tender Price*, including the test extended total, or if the revised total *Tender Price*, including the test extended total, alters the ranking of the tenderers according to the lowest *Tender Price*,

then the omitted unit price for that tender item is deemed to materially affect the *Tender Price* relative to other tenders and the tender shall be rejected;

- (iii) if the tender is not rejected under subparagraph (ii) of this IT 15.3 (c), then the unit price and the extended total for that tender item shall both be deemed to be, and the costs for that tender item shall be zero deemed to be included in other tender items prices;

- d) In no event shall page totals in the *Schedule of Quantities and Prices* or the total *Tender Price* be used to calculate missing extended totals or unit prices.

- |             |                       |      |   |
|-------------|-----------------------|------|---|
| <b>16.0</b> | <b>Subcontractors</b> | 16.1 | The <i>Owner</i> reserves the right to object to any of the subcontractors listed in a tender. If the <i>Owner</i> objects to any of the subcontractor(s) then the <i>Owner</i> will permit a tenderer to, within 5 days, propose a substitute subcontractor(s) acceptable to the <i>Owner</i> provided that there is not resulting adjustment in the <i>Tender Price</i> or the completion date set out in paragraph 2.2 of the Form of Tender. A tenderer will not be required to make such substitution and, if the <i>Owner</i> objects to a listed <i>Subcontractor(s)</i> , the tenderer may, rather than propose a substitute subcontractor(s), consider its tender rejected by the <i>Owner</i> and by written notice withdraw its tender. The <i>Owner</i> shall, in the event, return the tenderer's bid security |
| <b>17.0</b> | <b>Optional Work</b>  | 17.1 | If the <i>Schedule of Quantities and Prices</i> includes any tender prices for <i>Optional or Provisional Work</i> , as defined in GC 7.4.1, the tenderers must complete all the unit prices for such <i>Optional or Provisional Work</i> . Such tender prices shall not include any general overhead costs, or other costs, or profit, not directly related to the <i>Optional or Provisional Work</i> .   |
|             |                       | 17.2 | Notwithstanding that the <i>Owner</i> may elect not to proceed with the <i>Optional or Provisional Work</i> , the tender prices for any <i>Optional or Provisional Work</i> , including the extended totals for <i>Optional or Provisional Work</i> unit prices, shall be included in the <i>Tender Price</i> for the purpose of any price comparisons between tenders.   |

# ***Form of Tender***



## Form of Tender

Tender No. 81456

### Culvert Replacement at Dewdney Trunk

#### Summary

Name of **Contractor**:

\_\_\_\_\_

**Tender Price** (exclude GST): \$

\_\_\_\_\_  
(FROM APPENDIX 1 OF FORM OF TENDER)

**Tender submitted must be accompanied by a copy of the original 10% Bid Bond and will be received**

**On or before 2:00 pm (local time)**

**Thursday, June 6, 2024**

#### Instructions for Tender Submission

**Tender submissions are to be consolidated into one (1) .pdf file and uploaded electronically through QFile, the City's file transfer service accessed at website: [qfile.coquitlam.ca/bid](http://qfile.coquitlam.ca/bid)**

- 1. In the "Subject Field" enter:** Tender Number and Name
- 2. Add consolidated Tender file in PDF format, and Appendix 1 in XLS format, and Send**  
(ensure your web browser remains open until you receive 2 emails from Qfile to confirm upload is complete and was sent to the correct email address: [bid@coquitlam.ca](mailto:bid@coquitlam.ca) )

**Tenderers are responsible to allow ample time to complete the Tender submission process. If assistance is required, phone 604-927-3037.**

June 2024

THE CITY OF COQUITLAM  
3000 Guildford Way  
Coquitlam, B.C. V3B 7N2

---

( FOR USE WHEN UNIT PRICES FORM THE BASIS OF PAYMENT - TO BE USED ONLY WITH THE GENERAL CONDITIONS  
AND OTHER STANDARD DOCUMENTS OF THE UNIT PRICE MASTER MUNICIPAL CONSTRUCTION DOCUMENTS. )

**Contract Name:** Culvert Replacement at Dewdney Trunk  
**Reference No.:** 81456

**TO OWNER:**

**1 WE, THE UNDERSIGNED:**

- 1.1 have received and carefully reviewed all of the *Contract Documents*, including the Instructions to Tenderers, the City of Coquitlam Supplementary General Conditions, the City of Coquitlam Supplementary Contract Specifications, the specified edition of the "Master Municipal Construction Documents – General Conditions, Specifications and Standard Detail Drawings" and the following Addenda:

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_;

( ADDENDA, IF ANY )

- 1.2 shall fully disclose any actual or potential conflicts of interest and existing business relationships we may have with the City, their elected or appointed officials or employees:

\_\_\_\_\_

- 1.3 have full knowledge of the *Place of the Work*, and the *Work* required; and  
1.4 have complied with the Instructions to Tenderers; and

**2 ACCORDINGLY WE HEREBY OFFER:**

- 2.1 to perform and complete all of the *Work* and to provide all the labour, equipment and material all as set out in the *Contract Documents*, in strict compliance with the *Contract Documents*; and  
2.2 to achieve *Substantial Performance* of the *Work* on or before **September 15, 2024**; and  
2.3 to do the *Work* for the price, which is the sum of the products of the actual quantities incorporated into the *Work* and the appropriate unit prices set out in Appendix 1, the "*Schedule of Quantities and Prices*", plus any lump sums or specific prices and adjustment amounts as provided by the *Contract Documents*. For the purposes of tender comparison, our offer is to complete the *Work* for the "*Tender Price*" as set out on Appendix 1 of this Form of Tender. Our *Tender Price* is based on the estimated quantities listed in the *Schedule of Quantities and Prices*, and excludes *GST*.



---

**3 WE CONFIRM:**

- 3.1 that we understand and agree that the quantities as listed in the *Schedule of Quantities and Prices* are estimated, and that the actual quantities will vary.
- 3.2 that we understand and agree that the owner is in no way obliged to accept this Tender.

**4 WE CONFIRM:**

- 4.1 that the following Appendices are attached to and form a part of this tender:
  - 4.1.1 the Appendices as required by paragraph 5.3 of the Instructions to Tenderers - Part II; and
  - 4.1.2 the *Bid Security* as required by paragraph 5.2 of the Instructions to Tenderers - Part II.
  - 4.1.3 the Certificate of Compliance on the form provided in Appendix 7 of this Form of Tender.

**5 WE AGREE:**

- 5.1 that this tender will be irrevocable and open for acceptance by the *Owner* for a period of **60** calendar days from the day following the *Tender Closing Date and Time*, even if the tender of another Tenderer is accepted by the *Owner*. If within this period the *Owner* delivers a written notice ("*Notice of Award*") by which the *Owner* accepts our tender we will:
  - 5.1.1 within **15 Days** of receipt of the written *Notice of Award* deliver to the *Owner*:
    - a) a Performance Bond and a Labour and Material Payment Bond, each in the amount of 50% of the *Contract Price*, issued by a surety licensed to carry on the business of suretyship in the province of British Columbia, and in a form acceptable to the *Owner*;
    - b) a "clearance letter" indicating that the Tenderer is in WCB compliance; and
    - c) a copy of the insurance policies as specified in SGC Section 24 indicating that all such insurance coverage is in place and;
    - d) a letter confirming the *Contractor* as "Prime Contractor" for the Contract as specified in SGC Section 21.2.1.
  - 5.1.2 within **2 Days** of receipt of written "*Notice to Proceed*", or such longer time as may be otherwise specified in the *Notice to Proceed*, commence the *Work*; and
  - 5.1.3 sign the Contract Documents as required by GC 2.1.

---

**6 WE AGREE:**

6.1 that, if we receive written *Notice of Award* of this *Contract* and, contrary to paragraph 5 of this Form of Tender, we:

6.1.1 fail or refuse to deliver the documents as specified by paragraph 5.1.1 of this Form of Tender; or

6.1.2 fail or refuse to commence the *Work* as required by the *Notice to Proceed*,

**then such failure or refusal will be deemed to be a refusal by us to enter into the *Contract*** and the *Owner* may, on written notice to us, award the *Contract* to another party. We further agree that, as full compensation on account of damages suffered by the *Owner* because of such failure or refusal, the *Bid Security* shall be forfeited to the *Owner*, in an amount equal to the lesser of:

6.1.3 the face value of the *Bid Security*; and

6.1.4 the amount by which our *Tender Price* is less than the amount for which the *Owner* contracts with another party to perform the *Work*.

**7 OUR ADDRESS** is as follows:

---

---

---

Phone: \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

Email: \_\_\_\_\_

Attention: \_\_\_\_\_

This Tender is executed this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

*Contractor:*

---

**(FULL LEGAL NAME OF CORPORATION, PARTNERSHIP OR INDIVIDUAL)**

---

**(AUTHORIZED SIGNATORY)**

---

**(AUTHORIZED SIGNATORY)**

---

**8 WE CONFIRM:**

8.1 our Goods and Services Tax (GST) registration status is as follows:

8.1.1 for information purposes, our GST Registration Number is:

---

**(GST REGISTRATION NUMBER)**

**or;**

8.1.2 by signature hereunder, we certify we are **not required** to provide a registration number:

---

**(AUTHORIZED SIGNATORY)**

---

**(AUTHORIZED SIGNATORY)**

**APPENDIX 1  
FORM OF TENDER****Contract 81456  
Culvert Replacement at Dewdney Trunk****SCHEDULE OF QUANTITIES AND PRICES**

(see paragraph 5.3.1 of the Instruction to Tenderers – Part II)

(All prices and quotations including the *Contract Prices* shall include all *Taxes*, but shall not include *GST*.)

(Should there be any discrepancy in the information provided, the City's original file copy shall prevail)

ITEM NO.	MMCD Ref./ (Supp. Specs)	DESCRIPTION	UNIT	QTY	UNIT PRICE	EXTENDED AMOUNT
<b>1.00</b>	<b>01 55 005</b>	<b>TRAFFIC CONTROL, VEHICLE ACCESS AND PARKING</b>				
1.01	(1.5.1)	Traffic Control and Management as described in this section and Appendix A	l.s	1	\$	\$
1.02	(1.5.1)	Supply and operation of two Continuously Operating Temporary Traffic Control Signal (COTTCS) as described in this section and Appendix A	per month	2	\$	\$
<b>2.00</b>	<b>01 57 015</b>	<b>ENVIRONMENTAL PROTECTION</b>				
2.10	(1.6.1)	Environmental Protection (Sediment and Erosion Control) including bypass pumping	l.s	1	\$	\$
<b>3.00</b>	<b>01 58 015</b>	<b>PROJECT IDENTIFICATION</b>				
3.01	(1.3.1)	Construction Zone Information Signs	ea.	2	\$	\$
3.02	(1.3.2)	Changeable Message Boards (x2 Boards)	per month	2	\$	\$
<b>4.00</b>	<b>03 30 205</b>	<b>CONCRETE WALKS, CURBS AND GUTTERS</b>				
4.01	(1.4.3)	Remove and Replace Concrete Curb and Gutter, MMCD C5 (Provisional)	lin.m	12	\$	\$
4.02	(1.4.5)	Remove and Replace Concrete Sidewalk (MMCD C2) (Provisional)	sq.m	18	\$	\$
<b>5.00</b>	<b>31 23 015</b>	<b>EXCAVATING, TRENCHING AND BACKFILLING</b>				
5.01	(1.10.9)	Coordination, excavation, disposal, backfilling, preparation and support for 168mm Gas Main Relocation	l.s	1	\$	\$
<b>6.00</b>	<b>31 24 135</b>	<b>ROADWAY EXCAVATION, EMBANKMENT AND COMPACTION</b>				
6.01	1.8.4	Removal and Disposal of existing manhole, pipes, culvert and excavated material	l.s	1	\$	\$
6.02	(1.8.5)	Common excavation for rip rap placement (incl off site disposal)	c.m	35	\$	\$
6.03	(1.8.6)	Remove, Stockpile and Restore Existing Boulders	l.s	1	\$	\$
<b>7.00</b>	<b>31 32 19</b>	<b>GEOSYNTHETICS</b>				
7.01	1.6.1	Supply and Installation of non-woven geotextile underlay	sq.m	40	\$	\$
<b>8.00</b>	<b>31 37 105</b>	<b>RIPRAP</b>				
8.01	(1.4.1)	Supply & Install of 25kg Rip Rap, including surface preparation, re-shaping, grading, as shown on drawings and as described in contract documents	tonne	45	\$	\$
<b>9.00</b>	<b>32 91 215</b>	<b>TOPSOIL AND FINISH GRADING</b>				
9.01	(1.4.1)	Supply & Installation of 100mm topsoil and as specified in contract documents and all related works	cu.m	5	\$	\$
<b>10.00</b>	<b>32 92 20</b>	<b>SEEDING</b>				
10.01	1.8.1	Supply & Installation of coastal reclamation mix and all related works as shown on the drawing	sq.m	50	\$	\$
<b>11.00</b>	<b>33 40 01</b>	<b>STORM SEWERS</b>				
11.01	(1.6.2)	Supply and Installation of 1200mm C76 CLV Concrete Storm Pipe c/w approved imported granular trench backfill, surface restoration and all related works as shown on the contract drawing and as described in contract documents	l.m	31	\$	\$
11.02	(1.6.2)	300mm PVC Storm Pipe c/w approved imported granular trench backfill	l.m	2	\$	\$
11.03	(1.6.2)	300mm PVC Storm Pipe c/w approved imported granular trench backfill (Provisional)	l.m	2	\$	\$
<b>12.00</b>	<b>33 42 13</b>	<b>PIPE CULVERTS</b>				
12.01	1.5.1	Supply and Installation of Concrete Headwall, Dissipator Blocks, Grillage and Handrails and all related works as shown on the contract drawing and as described in contract documents	l.s	1	\$	\$
<b>13.00</b>	<b>33 44 015</b>	<b>MANHOLES AND CATCHBASINS</b>				
13.01	(1.5.1)	Supply & Installation of 2400mm gasketed manhole including frames, lid, base, riser, barrel and all related works as shown on the contract drawing and as described in contract documents	l.s	1	\$	\$

Total Tendered Price (exclude GST) \$ \_\_\_\_\_

(Transfer the amount to Form of Tender Summary Page 1)

Name of Contractor: \_\_\_\_\_

**APPENDIX 2**

**FORM OF TENDER**

**Contract 81456**  
**Culvert Replacement at Dewdney Trunk**

**PRELIMINARY CONSTRUCTION SCHEDULE**  
**(See paragraph 5.3.2 of the Instructions to Tenderers)**

INDICATE SCHEDULE WITH BAR CHART WITH CONSTRUCTION DURATIONS

CONSTRUCTION ACTIVITY	AUGUST				SEPTEMBER	
	1	2	3	4	1	2

Substantial Completion Date: **September 15, 2024**

Proposed Disposal Site: \_\_\_\_\_

**APPENDIX 3**

**FORM OF TENDER**

**Contract 81456  
Culvert Replacement at Dewdney Trunk**

**EXPERIENCE OF SUPERINTENDENT**

(See paragraph 5.3.3 of the Instructions to Tenderers)

**Proposed Project Superintendent** \_\_\_\_\_

**List of Project Experience**

<b>PROJECT:</b>		<b>Dates:</b>	
<b>Work Description:</b>			
<b>Responsibility:</b>			
<b>Owner/Reference:</b>		<b>Phone No.:</b>	

<b>PROJECT:</b>		<b>Dates:</b>	
<b>Work Description:</b>			
<b>Responsibility:</b>			
<b>Owner/Reference:</b>		<b>Phone No.:</b>	

<b>PROJECT:</b>		<b>Dates:</b>	
<b>Work Description:</b>			
<b>Responsibility:</b>			
<b>Owner/Reference:</b>		<b>Phone No.:</b>	

**APPENDIX 4**

**FORM OF TENDER**

**Contract 81456  
Culvert Replacement at Dewdney Trunk**

**CONTRACTOR'S COMPARABLE WORK EXPERIENCE**  
(See paragraph 5.3.4 of the Instructions to Tenderers)

<b>PROJECT:</b>		<b>VALUE (\$):</b>	
<b>OWNER:</b>		<b>Phone No.:</b>	
<b>Work Description:</b>			

<b>PROJECT:</b>		<b>VALUE (\$):</b>	
<b>OWNER:</b>		<b>Phone No.:</b>	
<b>Work Description:</b>			

<b>PROJECT:</b>		<b>VALUE (\$):</b>	
<b>OWNER:</b>		<b>Phone No.:</b>	
<b>Work Description:</b>			

<b>PROJECT:</b>		<b>VALUE (\$):</b>	
<b>OWNER:</b>		<b>Phone No.:</b>	
<b>Work Description:</b>			

**APPENDIX 5**

**FORM OF TENDER**

**Contract 81456  
Culvert Replacement at Dewdney Trunk**

**SUBCONTRACTORS**

(See paragraph 5.3.5 of the Instructions to Tenderers)

<b>Trade:</b>		<b>Tender Item:</b>	
<b>Work Description:</b>			
<b>Subcontractor:</b>		<b>Phone No.:</b>	

<b>Trade:</b>		<b>Tender Item:</b>	
<b>Work Description:</b>			
<b>Subcontractor:</b>		<b>Phone No.:</b>	

<b>Trade:</b>		<b>Tender Item:</b>	
<b>Work Description:</b>			
<b>Subcontractor:</b>		<b>Phone No.:</b>	

<b>Trade:</b>		<b>Tender Item:</b>	
<b>Work Description:</b>			
<b>Subcontractor:</b>		<b>Phone No.:</b>	

<b>Trade:</b>		<b>Tender Item:</b>	
<b>Work Description:</b>			
<b>Subcontractor:</b>		<b>Phone No.:</b>	



---

**APPENDIX 6**

**FORM OF TENDER**

**Contract 81456**  
**Culvert Replacement at Dewdney Trunk**

**Bid Bond**

NO. \_\_\_\_\_

\$ \_\_\_\_\_

KNOW ALL MEN BY THESE PRESENTS THAT

\_\_\_\_\_  
As Principal, hereinafter called the Principal, and

\_\_\_\_\_  
As Surety, hereinafter called the Surety, are held and firmly bound unto

\_\_\_\_\_  
As Oblige, hereinafter called the Oblige, in the amount of

\_\_\_\_\_ Dollars (\$\_\_\_\_\_) lawful money of  
Canada, for the payment of which sum, well and truly to be made, the Principal and the Surety bind  
themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these  
presents.

WHEREAS, the Principal has submitted a written Tender to the Oblige, dated the \_\_\_\_\_ day of  
\_\_\_\_\_, 2024, for Contract \_\_\_\_\_.

NOW, THEREFORE, THE CONDITION OF THIS OBLIGATION is such that if the aforesaid Principal shall have the  
Tender accepted within sixty (60) days from the Closing Date of Tender and the said Principal will, within the  
time required, enter into a formal contract and give good and sufficient bonds to secure the performance of  
the terms and conditions of the Contract, then this obligation shall be null and void; otherwise the Principal  
and Surety will pay unto the Oblige the difference in money between the amount of the bid of the said  
Principal and the amount for which the Oblige legally contracts with another party to perform the work if the  
latter amount be in excess of the former.

The Surety shall not be liable for a greater sum than the specified penalty of this Bond.

Any suit under this Bond must be instituted before the expiration of six (6) months from the date of this Bond.

IN TESTIMONY WHEREOF, the Principal has hereto set its hand and affixed its seal, and the Surety has caused  
these presents to be sealed with its corporate seal duly attested by the signature of its Attorney-In-Fact,  
this \_\_\_\_\_ day of \_\_\_\_\_, 2024.

SIGNED, SEALED AND DELIVERED

In the presence of:

)

)

)

)

)

\_\_\_\_\_  
PRINCIPAL

\_\_\_\_\_  
SURETY

---

**APPENDIX 7**

**FORM OF TENDER**

**Contract 81456**  
**Culvert Replacement at Dewdney Trunk**

**CERTIFICATE OF COMPLIANCE for CONTRACT INSURANCE**

---

This is provided for information to certify that the Tenderer does hereby undertake and agree to supply to the City of Coquitlam, upon award, contract insurance listed below for the project requirements indicated:

**Contract Number:**      **81456**

**Contract Name:**      **Culvert Replacement at Dewdney Trunk**

**Description of Work:**

- C76 Class V 1200mm concrete pipe - Approx. 30metres
- Storm Manhole - 2400 diameter
- Precast Concrete Headwall Max Series – 2.1m width x 2.2m height
- Other miscellaneous and incidental work as contained in the Contract Documents

**Commercial General Liability:**      **\$5,000,000 limit**

<b>Special Coverage Required:</b>	<b><u>YES</u></b>	<b><u>NO</u></b>	<b><u>Special Coverage Description</u></b>
	(   )	( X )	Shoring and Underpinning Hazard
	(   )	( X )	Pile Driving and Vibrations
	( X )	(   )	Excavation Hazard
	(   )	( X )	Demolition
	(   )	( X )	Blasting

We also certify that the insurance coverage will meet the requirements of the Supplementary General Conditions Section 24 – Insurance, included as part of the Contract Documents, and that the proof of insurance will be provided on the City of Coquitlam Certificate of Insurance form, without amendments, except for the exclusions noted above.

---

*Name of Tenderer (printed)*

---

*Authorized Signature*

---

Date

# ***Agreement***

## AGREEMENT

### Between Owner and Contractor

( FOR USE WHEN UNIT PRICES FORM THE BASIS OF PAYMENT - TO BE USED ONLY WITH THE GENERAL CONDITIONS AND OTHER STANDARD DOCUMENTS OF THE UNIT PRICE MASTER MUNICIPAL CONSTRUCTION DOCUMENTS. )

**THIS AGREEMENT** made in duplicate this \_\_\_\_ day of \_\_\_\_\_ 2024.

**Contract:** Culvert Replacement at Dewdney Trunk

**Reference No.** 81456

#### BETWEEN:

The City of Coquitlam  
3000 Guildford Way  
Coquitlam, B.C. V3B 7N2

(the "Owner")

#### AND:

(the "Contractor")

The *Owner* and the *Contractor* agree as follows:

#### 1 THE WORK - START/COMPLETION DATES

- 1.1 The *Contractor* will perform all *Work* and provide all labour, equipment and material and do all things strictly as required by the *Contract Documents*.
- 1.2 The *Contractor* will commence the *Work* in accordance with the *Notice to Proceed*. The *Contractor* will proceed with the *Work* diligently, will perform the *Work* generally in accordance with the construction schedules as required by the *Contract Documents* and will achieve *Substantial Performance* of the *Work* on or before **September 15, 2024**, subject to the provisions of the *Contract Documents* for adjustments to the *Contract Time*.
- 1.3 Time shall be the essence of the Contract.

## **2 CONTRACT DOCUMENTS**

- 2.1 The "*Contract Documents*" consist of the documents listed or referred to in Schedule 1, entitled "*Schedule of Contract Documents*", which is attached and forms a part of this Agreement, and includes any and all additional and amending documents issued in accordance with the provisions of the *Contract Documents*. All of the *Contract Documents* shall constitute the entire *Contract* between the *Owner* and the *Contractor*.
- 2.2 The *Contract* supersedes all prior negotiations, representations or agreements, whether written or oral, and the *Contract* may be amended only in strict accordance with the provisions of the *Contract Documents*.

## **3 CONTRACT PRICE**

- 3.1 The price for the *Work* ("*Contract Price*") shall be the sum in Canadian dollars of the following:
- a ) the product of the actual quantities of the items of *Work* listed in the *Schedule of Quantities and Prices* which are incorporated into or made necessary by the *Work* and the unit prices listed in the *Schedule of Quantities and Prices*; plus
  - b ) all lump sums, if any, as listed in the *Schedule of Quantities and Prices*, for items relating to or incorporated into the *Work*; plus
  - c ) any adjustments, including any payments owing on account of *Changes* and agreed to *Extra Work*, approved in accordance with the provisions of the *Contract Documents*.
- 3.2 The *Contract Price* shall be the entire compensation owing to the *Contractor* for the *Work* and this compensation shall cover and include all profit and all costs of supervision, labour, material, equipment, overhead, financing, and all other costs and expenses whatsoever incurred in performing the *Work*.

## **4 PAYMENT**

- 4.1 Subject to applicable legislation and the provisions of the *Contract Documents*, the *Owner* shall make payments to the *Contractor*.
- 4.2 If the *Owner* fails to make payments to the *Contractor* as they become due in accordance with the terms of the *Contract Documents* then interest calculated at 2% per annum over the prime commercial lending rate of the Royal Bank of Canada on such unpaid amounts shall also become due and payable until payment. Such interest shall be calculated and added to any unpaid amounts monthly.

## **5 RIGHTS AND REMEDIES**

- 5.1 The duties and obligations imposed by the *Contract Documents* and the rights and remedies available hereunder shall be in addition to and not a limitation of any duties, obligations, rights and remedies otherwise imposed or available by law.

- 5.2 Except as specifically set out in the *Contract Documents*, no action or failure to act by the *Owner*, *Contract Administrator* or *Contractor* shall constitute a waiver of any of the parties' rights or duties afforded under the *Contract*, nor shall any such action or failure to act constitute an approval of or acquiescence in any breach under the *Contract*.

## 6 NOTICES

- 6.1 Communications among the *Owner*, the *Contract Administrator* and the *Contractor*, including all written notices required by the *Contract Documents*, may be delivered by email, or by hand, or by pre-paid registered mail to the addresses as set out below:

The *Owner*:

The City of Coquitlam  
3000 Guildford Way  
Coquitlam, B.C. V3B 7N2

Tel: 604-927-3500

The *Contractor*:

Tel:  
Email:  
Attention:

The *Contract Administrator*:

The City of Coquitlam  
3000 Guildford Way  
Coquitlam, B.C. V3B 7N2

Tel:  
Email:  
Attention:

- 6.2 A communication or notice that is addressed as above shall be considered to have been received:

- a ) immediately upon delivery, if delivered by hand; or
- b ) immediately upon transmission if sent or received by email; or
- c ) after 5 days from date of posting if sent by registered mail.

- 6.3 The *Owner* or the *Contractor* may, at any time, change its address for notice by giving written notice to the other at the address then applicable. Similarly if the *Contract Administrator* changes its address for notice then the *Owner* will give or cause to be given written notice to the *Contractor*.

## 7 GENERAL

- 7.1 This *Contract* shall be construed according to the laws of British Columbia.

- 7.2 The *Contractor* shall not, without the express written consent of the *Owner*, assign this *Contract*, or any portion of this *Contract*.
- 7.3 The headings included in the *Contract Documents* are for convenience only and do not form part of this *Contract* and will not be used to interpret, define or limit the scope or intent of this *Contract* or any of the provisions of the *Contract Documents*.
- 7.4 A word in the *Contract Documents* in the singular includes the plural and, in each case, vice versa.
- 7.5 This agreement shall enure to the benefit of and be binding upon the parties and their successors, executors, administrators and assigns

IN WITNESS WHEREOF the parties hereto have executed this Agreement the day and year first written above.

*Contractor:*

\_\_\_\_\_  
(FULL LEGAL NAME OF CORPORATION, PARTNERSHIP OR INDIVIDUAL)

\_\_\_\_\_  
(AUTHORIZED SIGNATORY)

\_\_\_\_\_  
(AUTHORIZED SIGNATORY AND POSITION - PRINT)

*Owner:*

The City of Coquitlam

\_\_\_\_\_  
(MANAGER, CAPITAL PROJECTS AND INSPECTIONS)  
Representative as Per G.C. 17

\_\_\_\_\_  
(MANAGER, DESIGN AND CONSTRUCTION)

## **Culvert Replacement at Dewdney Trunk**

**Reference No: 81456**

### **Schedule 1**

#### **Schedule of Contract Documents**

**(INCLUDE IN LIST ALL DOCUMENTS INCLUDING, IF ANY, SUPPLEMENTARY GENERAL CONDITIONS, SUPPLEMENTARY SPECIFICATIONS, SUPPLEMENTARY STANDARD DETAIL DRAWINGS)**

The following is an exact and complete list of the *Contract Documents*, as referred to in Article 2.1 of the Agreement.

**NOTE:** The documents noted with "\*" are contained in the "Master Municipal Construction Documents – General Conditions, Specifications and Standard Detail Drawings", edition dated 2009. All sections of this publication are included in the *Contract Documents*.

1. Agreement, including all Schedules;
2. The following Addenda:
  - As issued
3. Supplementary General Conditions, if any;
4. General Conditions\*;
5. Supplementary Specifications, if any;
6. Detail Specifications, if any;
7. Specifications\*;
8. Supplementary Detail Drawings, if any;
9. Standard Detail Drawings\*;
10. Executed Form of Tender, including all Appendices;
11. Drawings listed in Schedule 2 to the Agreement – "List of Drawings", if any;
12. Instructions to Tenderers;
13. COQUITLAM "Supplementary Specifications Master Municipal Construction Documents" March 2022



**Culvert Replacement at Dewdney Trunk**

**Reference No: 81456**

**Schedule 2**

**LIST OF DRAWINGS**

**(Complete Listing of All Drawings, Plans and Sketches That Are Part of the Contract Documents)**

**Bound in this Document:**

**Appendix A: Traffic Management Detail Specifications**

**Appendix B: Construction Mitigation Plan**

**Bound Separately: Contract Drawings**

TITLE	SHEET NO.	REVISION NO.	DATE
Passage Drive Storm Sewer Rehabilitation – Cover Page	NA	NA	NA
Dewdney Trunk Road STM MH55 to STM HW1 – General Notes	1 of 2	3	2024-05-14
Dewdney Trunk Road STM MH55 to STM HW1 – Plan & Profile	2 of 2	4	2024-05-14

# ***Supplementary General Conditions***

## SUPPLEMENTARY GENERAL CONDITIONS

### TABLE OF CONTENTS

	Page
Supplementary General Conditions to MMCD Volume II, 2009 Issue .....	SGC 1 to SGC 17
<b>Section 1: DEFINITIONS .....</b>	<b>SGC 3</b>
1.1 Abnormal Weather .....	SGC 3
<b>Section 2: DOCUMENTS .....</b>	<b>SGC 3</b>
2.2 Interpretation .....	SGC 3
<b>Section 4: CONTRACTOR .....</b>	<b>SGC 3 to 7</b>
4.1 Control of Work .....	SGC 3
4.2 Safety .....	SGC 4
4.3 Protection of Work, Property and the Public .....	SGC 4
4.6 Construction Schedule .....	SGC 5
4.7 Superintendent .....	SGC 5
4.8 Workers .....	SGC 5
4.9 Materials .....	SGC 5
4.11 Subcontractors .....	SGC 5
4.12 Tests and Inspections .....	SGC 6
4.14 Final Clean-up .....	SGC 7
4.16 Notice of Disruption .....	SGC 7
<b>Section 7: CHANGES .....</b>	<b>SGC 7</b>
7.1 Changes .....	SGC 7
7.4 Optional Work .....	SGC 7
<b>Section 9: VALUATION OF CHANGES AND EXTRA WORK .....</b>	<b>SGC 8</b>
9.2 Valuation Method .....	SGC 8
9.4 Quantity Variations .....	SGC 8
<b>Section 10: FORCE ACCOUNTS .....</b>	<b>SGC 8</b>
10.1 Force Account Costs .....	SGC 8
<b>Section 12: HAZARDOUS MATERIALS .....</b>	<b>SGC 9</b>
12.2 Discovery of Hazardous Materials .....	SGC 9
<b>Section 13: DELAYS .....</b>	<b>SGC 9 to 10</b>
13.1 Delay by Owner or Contract Administrator .....	SGC 9
13.3 Unavoidable Delay .....	SGC 9
13.8 Direction to Stop or Delay .....	SGC 9
13.9 Liquidated Damages for Late Completion .....	SGC 9
<b>Section 18: PAYMENT .....</b>	<b>SGC 10 to 11</b>
18.1 Preparation of Payment Certificate .....	SGC 10

18.4	Holdbacks .....	SGC 10
18.6	Substantial Performance .....	SGC 10
<b>Section 21: WORKERS COMPENSATION REGULATIONS .....</b>		<b>SGC 11</b>
21.2	Contractor is "Prime Contractor" .....	SGC 11
<b>Section 24: INSURANCE.....</b>		<b>SGC 11 to 16</b>
24.1	General .....	SGC 11
24.2	Required Insurance .....	SGC 12
24.3	Physical Loss or Damage with Respect to New Buildings under Construction and/or Major Additions to Existing Structures.....	SGC 13
24.4	Additional Insured .....	SGC 16
<b>Section 25: MAINTENANCE PERIOD .....</b>		<b>SGC 16 to 17</b>
25.1	Correction of Defects .....	SGC 16
<b>Section 27: CONTRACTOR PERFORMANCE EVALUATION .....</b>		<b>SGC 17</b>
<b>APPENDICES .....</b>		<b>SGC 18 to 24</b>
<b>Appendix I</b>	Performance Bond .....	SGC 18
<b>Appendix II</b>	Labour and Material Payment Bond .....	SGC 20
<b>Appendix III</b>	Certificate of Insurance .....	SGC 23
<b>Appendix IV</b>	Prime Contractor Designation Letter .....	SGC 24

## 1.0 DEFINITIONS

- 1.1 Abnormal Weather** 1.1.1 **(Replace clause 1.1.1 as follows):**  
Abnormal Weather” means temperature, precipitation, wind or other weather conditions in which the monthly average, differs from the statistical average for that condition in that period by more than one standard deviation, calculated based on data available from Environment Canada. Coquitlam’s Burke Mountain Rain Gauge will be used to compare the rainfall summary versus the available data from Environment Canada.  
[City of Coquitlam Rainfall](#)

## 2.0 DOCUMENTS

- 2.2 Interpretation** 2.2.4 (1) **(Replace clause 2.2.4 (1) as follows):**  
The Contract Documents shall govern and take precedence in the following order as listed in Schedule 1 of the Agreement, taking precedence over all Contract Documents.

## 4.0 CONTRACTOR

- 4.1 Control of the Work** 4.1.1 **(Add to clause 4.1.1 as follows):**  
The *Contractor* is responsible for all survey layout for the construction of the Work to the design specifications and/or elevations as shown on the contract drawings or as amended on site by the Contract Administrator.
- 4.1.2 **(Add to clause 4.1.2 as follows):**  
The Contractor shall not deposit any material upon any street, sidewalk, boulevard or other property, without the Contract Administrator’s or the Owner’s permission, nor shall they allow the same to remain longer than necessary. All surplus spoil and rubbish and other waste material shall be removed from the site so that the area of work is cleaned up and restored to as clean a condition as it was before the Contract started, within four days of the Contract Administrator’s written request to do so, failing which the Owner may carry out the work or have the work carried out by others and recover the costs from the Contractor or may deduct the cost from any monies due or that may become due to the Contractor.
- 4.1.3 **(Add new clause 4.1.3 as follows):**  
Work can be performed during the normal weekday working hours of 0700h to 1900h, unless specified otherwise in Supplementary Specifications - Appendix A: Traffic Management Detail Specifications. Written

These Supplementary General Conditions must be read in conjunction with the General Conditions contained in the Master Municipal Construction Documents, Volume II, Printed 2009

permission from the Contract Administrator will be required for any works to be performed outside of the normal working days of Monday to Friday.

No Sunday work will be permitted, except in case of emergency and then only with the written permission of the Contract Administrator and to such extent as he deems necessary.

In case the Contractor decides to work on a day which is a Statutory Holiday, they shall provide the Contract Administrator in writing at least (4) days in advance of such holiday, stating those places where said work is to be conducted. In case the Contractor fails to give such notice in advance of any Statutory Holiday, no work within the terms of the contract shall be done on such holiday.

**The cost of inspections on a Sunday or on a Statutory Holiday by City staff/s will be at Contractor's expense.**

**4.2 Safety**

4.2.2

***(Add new clause 4.2.2 as follows):***

*In an emergency, gas pipeline rupture or leak, Contact FortisBC's 24 Hour Emergency Line (1-800-663-9911) and Coquitlam Fire (911) immediately and then City of Coquitlam's Utility Control Centre (604-927-6287).*

**4.3 Protection of Work, Property and the Public**

4.3.1

***(Replace clause 4.3.1 as follows):***

In performing the Work, the Contractor shall protect the Work and the Owner's property and other person's property from damage. The Contractor shall at the Contractor's own expense make good any such damage which arises as the result of the Contractor's operations. If the Contractor causes damage to private property, the Contractor must obtain a written release from the owner of the damaged property.

4.3.5.1

***(Add clause 4.3.5.1 as follows):***

The Contractor shall notify the Contract Administrator immediately if damage occurs to any City or third party utility or structure.

4.3.7

***(Add new clause 4.3.7 as follows):***

Any lands other than those upon which the work is to be performed, which may be required for temporary facilities, storage purposes or access to the work site, other than those provided by the *Owner*, shall be provided by the *Contractor* at their own cost, with no liability to the *Owner*.

**4.6 Construction Schedule**

4.6.1

***(Replace clause 4.6.1 as follows):***

The Contractor shall within the time set out in the Form of Tender prepare and submit to the Contract Administrator for their approval a construction schedule (the Baseline Construction Schedule) indicating the planned start and completion dates of major activities of the Work. The Baseline Construction Schedule shall be in more detail than the Preliminary Construction Schedule and shall indicate completion of the Work in compliance with any specified Milestone Dates, including Substantial Performance.

4.6.6

***(Replace clause 4.6.6 as follows):***

The time for the performance of the Work shall commence on the date specified in the Notice to Proceed, or if not so specified, on the date the Notice to Proceed is issued. The Notice to Proceed will not be issued until the documentation required under paragraph 5.1.1 of the Form of Tender has been submitted and the construction schedule has been approved.

4.6.8

***(Add new clause 4.6.8 as follows):***

Any requests to lengthen the work schedule shall be made in writing by the Contractor within five working days of knowledge of the reason for the extension. The Contract Administrator will adjust the schedule at their discretion upon receipt of a written request.

**4.7 Superintendent**

4.7.4

***(Add new clause 4.7.4 as follows):***

The key personnel named in the Contractor's Tender response, shall remain in these key positions throughout the project. In the event that key personnel leave the Contractor's firm, or for any unknown reason are unable to continue fulfilling their role, the Contractor must propose a suitable replacement, and obtain written consent from the Owner. Acceptance of the proposed replacement is at the sole discretion of the Contract Administrator and the Owner.

**4.8 Workers**

4.8.2

***(Add new clause 4.8.2 as follows):***

The Contractor shall, upon the request of the Contract Administrator, remove any person employed by them for the purposes of the Contract who, in the opinion of the Contract Administrator, is incompetent or has conducted themselves improperly, and the Contractor shall not permit a person who has been removed to return to the Place of Work.

**4.9 Materials**

4.9.3

***(Add new clause 4.9.3 as follows):***

The Contractor shall, at their cost,

These Supplementary General Conditions must be read in conjunction with the General Conditions contained in the Master Municipal Construction Documents, Volume II, Printed 2009

- a) Be responsible for storing all of the materials supplied for the Work either by themselves or the Owner, until it has been incorporated into the completed Work;
- b) Store all materials in a manner which will prevent damage from the weather, dirt, foreign matter, vandalism and theft;
- c) Arrange for and/or verify the time of delivery of all materials to be supplied by themselves or the Owner to ensure that delivery will coincide with their work schedules.
- d) Examine with the Contract Administrator the quantities and details of all materials supplied by the Owner at the time and place of delivery or those materials already at the Place of Work, and prepare and sign a Statement of Materials Acceptance, specifically noting and rejecting any defective material;
- e) Replace all materials supplied by themselves or the Owner which are found to be stolen, missing or damaged while under their care;
- f) Replace all materials found to be defective in manufacture which have been supplied by themselves.

**4.11 Subcontractors**

4.11.3

***(Replace clause 4.11.3 as follows):***

The Contractor shall, upon notice of the Contract Administrator, remove any Subcontractor employed by them for the purposes of the Contract who, in the opinion of the Contract Administrator, is incompetent or has conducted themselves improperly, and the Contractor shall not permit the Subcontractor who has been removed to return to the Place of Work. The removal of a Subcontractor under this clause shall not be considered a Change and the Contract Price and the Contract Time shall not be adjusted.

**4.12 Test and Inspections**

4.12.1

***(Replace clause 4.12.1 as follows):***

The Contractor shall perform or cause to be performed all tests, inspections and approvals of the Work as described in the Contract Documents or as required by the Contract Administrator as part of Quality Control. The Contractor shall complete all the necessary testing at the frequencies described in the Contract Document unless otherwise approved by the Contract Administrator.

Acceptable test and inspection results will not relieve the Contractor of its obligations under the Contract to correct defects or deficiencies in the Work.

4.12.11

***(Add clause 4.12.11 as follows):***

Failure to follow DFO/FLNRO BMPs and the approved permit for Instream Works or as instructed by Contract Administrator will result in shut-down of the work. The

These Supplementary General Conditions must be read in conjunction with the General Conditions contained in the Master Municipal Construction Documents, Volume II, Printed 2009



Contractor must take all steps to mitigate impacts to aquatic resources, environment and habitats before work can re-start on site. No claim will be accepted by the Owner for costs associated with this work shut-down.

**4.14 Final Clean-up**

4.14.1

***(Replace clause 4.14.1 as follows):***

Prior to applying for Substantial Performance, the Contractor shall remove all surplus products, tools, construction machinery and equipment relating to the Work that is not required for the performance of the remaining Work. The Contractor shall also remove waste, debris and waste products other than caused by the Owner or Other Contractors, and leave the Place of Work clean and suitable for occupancy by the Owner unless otherwise specified in the Contract Documents or directed by the Contract Administrator.

**4.16 Notice of Disruption**

4.16.2

***(Add new clause 4.16.2 as follows):***

Written notice must be provided to all properties which may be physically affected by the construction not less than one week and not more than two weeks prior to construction.

Notify occupants directly affected by the work 48 hours in advance of commencement of construction. Cost of notifying area occupants of ensuing construction and delivery of the notices is incidental to the Contract.

**7.0 CHANGES**

**7.1 Changes**

7.1.3

***(Replace clause 7.1.3 as follows):***

Additional work that the Owner may wished performed that does not satisfy the requirements of subparagraphs (a) and (b) of GC 7.1.1 is extra work (Extra Work) and is not a Change. Pursuant to GC 8, Extra Work may be declined by the Contractor or may, upon agreement between the parties, be undertaken as Extra Work.

**7.4 Optional Work**

7.4.2

***(Add new clause 7.4.2 as follows):***

If there are Optional items or Provisional items included in the *Schedule of Quantities and Prices*, those items shall be used only as directed and at the sole discretion of the Contract Administrator through the issue of a Change Order. These items will be paid at the contract unit price as part of regular progress payments. Only quantities used will be eligible for payment. No claim will be accepted for unused Optional or Provisional quantities. Clause 9.4 Quantity Variations will not be applicable for these items.

**9.0 VALUATION OF  
CHANGES AND  
EXTRA WORK**

**9.2 Valuation Method**      9.2.4

***(Replace clause 9.2.4 as follows):***

Once a quotation is accepted by the Contract Administrator, or other agreement reached between the Contract Administrator and the Contractor regarding adjustments to the Contract Price or Contract Time on account of a Change or Extra Work, the Contractor shall not be entitled to claim or receive additional payment, or adjustment to the Contract Time on account of a Change or Extra Work.

**9.4 Quantity Variation**      9.4.1

***(Replace clause 9.4.1 as follows):***

If for any reason, including an addition or deletion under GC 7.1.1(1) or 7.1.1(2) respectively, the actual quantity of a unit price item varies by more than plus or minus the Variance Threshold Percentage from the estimated quantity for that unit price item listed in the Schedule of Quantities and Prices (the "Tender Quantity") or as otherwise agreed to pursuant to these Contract Documents, then either the Owner or the Contractor may by written notice request the other party to agree to a revised unit price, considering the change in quantities. A party shall make a request for a revised unit price as soon as reasonably possible after the party concerned becomes aware of the quantity variation.

9.4.2      ***(Delete clause 9.4.2 (2))***

**10.0 FORCE ACCOUNTS**

**10.1 Force Account  
Costs**      10.1.1(1)

***(Add to clause 10.1.1(1) as follows):***

Costs for the Contractor's Superintendent, Project Managers, Health and Safety Personnel, and Office/Administration Staff are not eligible for labour costs as those costs are considered incidental to the mark up owing for overhead and labour.

10.1.1(4)      ***(Replace clause 10.1.1(4) as follows):***

Force Account Work performed by a subcontractor shall be paid for in the lesser of: (i) the amount provided by subparagraphs (1), (2) and (3) of this GC, plus a mark-up of 5%, or (ii) the actual amount the Contractor pays the subcontractor including a mark-up of 10% on such actual costs to cover all overhead and profit.

**12.0 HAZARDOUS MATERIALS**

**12.2 Discovery of Hazardous Materials**

12.2.2

***(Replace clause 12.2.2 as follows):***

If the Contract Administrator observes any materials at the Place of Work that the Contract Administrator knows or suspects may be Hazardous Materials, then the Contract Administrator shall immediately give written notice to the Contractor and the Contractor shall immediately stop the Work or portion of the Work as required by GC 12.2.1(1).

**13.0 DELAYS**

**13.1 Delay by Owner or Contract Administrator**

13.1.2

***(Add new clause 13.1.2 as follows):***

The Owner may at any time suspend the work or any portion thereof provided they give the Contractor five (5) days' written notice of delay. The Contractor shall resume work upon written notice from the Owner. The Contractor shall be entitled to:

- a) An extension of the Contract time equivalent to the length of suspension of work.
- b) Reimbursement by the Owner for directly related out-of-pocket additional costs, reasonably and necessarily incurred by the Contractor as a result of such suspension. No additional payment will be made to the Contractor for any loss of profits or overhead.

**13.3 Unavoidable Delay**

13.3.1

***(Add to clause 13.3.1 as follows):***

Beyond the reasonable control of the Contractor also includes pandemic or community outbreak

**13.8 Direction to Stop or Delay**

13.8.3

***(Add new clause 13.8.3 as follows):***

The Contract Administrator may order the Contractor to stop work if at any time the Contract Administrator is of the opinion that there exists a danger to life or property.

**13.9 Liquidated Damages for Late Completion**

13.9.1

***(Replace clause 13.9.1 as follows):***

If the Contractor fails to meet the Milestone Date for Substantial Performance as set out in the Form of Tender, paragraph 2.2 as may be adjusted pursuant to the provisions of the Contract Documents, then the Owner may deduct from any monies owing to the Contractor for the Work:

- (1) An amount of \$1,000.00 for each calendar day the actual *Substantial Performance* is achieved after the Substantial Performance Milestone Date; plus

- (2) All direct out of pocket costs, such as costs for safety, security or equipment rental, reasonably incurred by the Owner as a direct result of such delay.

If the monies owing to the Contractor are less than the total amount owing by the Contractor to the Owner under (1) and (2) then any shortfall shall immediately, upon written notice from the Owner, and upon Substantial Performance, be due and owing by the Contractor to the Owner.

**18.0 PAYMENT**

**18.1 Preparation of  
Payment  
Certificate**

18.1.1

***(Replace clause 18.1.1 as follows):***

The Contract Administrator shall prepare and issue a certificate for the period ending the last calendar day of the month.

**18.4 Holdbacks**

18.4.2

***(Add to clause 18.4.2 as follows):***

At the sole discretion of the Contract Administrator, an amount equivalent to 10% of the contract award value or 200% of a reasonable estimate, whichever is higher, may be held without interest until all deficiencies have been remedied and accepted by the Contract Administrator.

**18.6 Substantial  
Performance**

18.6.5

***(Replace clause 18.6.5 as follows):***

The Owner may release any builders lien holdback on the 56th day following the date of Substantial Performance, or other date as required by law, but the Owner may hold back the amounts for any deficiencies or filed builders liens as provided in GC 18.4.2, 18.4.3 and 18.4.4.

18.6.6

***(Replace clause 18.6.6 as follows):***

The *Contract Administrator*, as defined herein, shall be the *Payment Certifier* responsible under Section 7 of the *Builders Lien Act* for certifying *Substantial Performance* of the *Work* of the *Contractor*, but not the *Work* of *Subcontractors*. The *Contractor* shall cooperate with and assist the *Contract Administrator* by providing information and assistance in a timely manner as the *Contract Administrator* considers necessary to carry out the duties of the *Payment Certifier* for the *Contract*.

The *Contractor* shall be the *Payment Certifier* responsible under Section 7 of the *Builders Lien Act* for certifying *Substantial Performance* of the *Work* of each *Subcontractor*. Prior to certifying completion for a *Subcontractor*, the *Contractor* shall consult the *Contract Administrator* and obtain the *Contract Administrator's* comments on the status of completion by the *Subcontractor*, including any deficiencies or defects in the *Subcontractor's Work* noted by

the *Contract Administrator*. The *Contractor* will indemnify and save the *Owner* harmless from any and all liability the *Owner* may have to anyone arising out of the certification by the *Contractor* of *Substantial Performance* for that *Subcontractor*.

Notwithstanding any other provision of the *Contract*, no payments will be due or owing to the *Contractor* so long as a Lien filed by anyone claiming under or through the *Contractor* remains registered against the Project of any lands, or interest therein, on which *Work* for the project was performed. Failure of the *Contractor* to remove all Liens promptly will entitle the *Owner* to damages.

**21.0 WORKERS  
COMPENSATION  
REGULATIONS**

**21.2 Contractor is  
"Prime Contractor"**

21.2.1

***(Add to clause 21.2.1 as follows):***

Prior to the issuance of the "Notice to Proceed" the Contractor must provide a signed "Prime Contractor Designation" form as provided in Appendix IV of these Supplementary General Conditions.

**24.0 INSURANCE**

***(Replace section 24.0 as follows):***

**24.1 General**

24.1.1

**Importance of Prompt Attention to Insurance  
Requirements:**

The Contractor shall provide the Owner with satisfactory evidence that the insurance required to be provided under this GC is in full force and effect.

24.1.2

**Acceptable Insurance Carriers:**

The insurer issuing any policy, or other document which is evidence of insurance to the Contractor, shall be an insurer licensed by the Superintendent of Insurance in the Province of British Columbia and registered with the Department of Insurance for Canada in Ottawa, except the Insurance Corporation of British Columbia, which is not subject to this condition.

24.1.3

**Owner's Right to Change Terms:**

Notwithstanding anything contained in the Contract Documents, the Owner will have the right to request a change to the specified terms and conditions respecting insurance at the sole option of the Owner. The Contractor will be notified in writing of any changes required by the Owner and will provide a quotation for such work.

24.1.4 **Delivery of Insurance Documents:**

All insurance policies or other acceptable specified documents shall be delivered to, and accepted by, the Owner before the Contract Documents are signed. No work shall be commenced by the Contractor or by anyone acting on the instructions of the Contractor, until the required Insurance Documents have been accepted by the Owner and the Contract Documents have been duly signed by the Owner and the Contractor.

24.1.5 **Owner's Right to Insure:**

Should the Contractor for any reason not comply with the specified requirements with respect to the insurance, the Owner will, at the Owner's option, have the right to purchase all or any part of such insurance which, in the opinion of the Owner, may be required to provide the specified insurance, and, in the event of so doing, the Owner will have the right to pay the premiums for such insurance and to withhold the amount of premiums so paid from any amount due and payable to the Contractor under the Contract.

**24.2 Required Insurance**

24.2.1 **General**

Damage to work (excluding Building Contracts where Section 24.3, Paragraph 24.3.1, Further Responsibilities of Contractor, applies).

The Contractor shall be responsible for any and all loss, or damage, whatsoever which may occur on or to the works, completed or otherwise, until such time as the entire works have been completed and the Notice of Acceptance has been issued by the Owner, except that loss or damage caused solely by an act of the Owner. In the event of any loss or damage occurring, the Contractor shall, on notice from the Contract Administrator, immediately put the works into the condition it was immediately prior to such loss or damage, all at the

Contractor's expense, except where such loss or damage was caused solely by an act of the Owner.

The Contractor shall be responsible for any and all loss or damage whatsoever which may occur on or to the works, completed or otherwise, arising out of the negligence of the Contractor, any subcontractors, and the employees or agents of any of them.

24.2.2 **Public Liability Insurance:**  
(Other than Automobile Third Party Liability Insurance):

**Evidence of Insurance:**

The Contractor shall deposit with the Owner, before the work commences, a Certificate of Insurance, signed by an authorized representative of the insurer, such certificate to be as shown in Appendix III.

**Effective Dates and Terms:**

The effective date of the Certificate of Insurance shall be the date of the execution of the Contract Agreement and the term of this policy shall be from such effective date until a date not less than twelve (12) months after the date of Substantial Performance completion of all work under the Contract.

**Limits of Liability:**

For bodily injury and for property damage shall be inclusive limits not less than \$5,000,000.

24.2.3 **Public Liability Insurance (Automobile):**

The Contractor shall deposit with the Owner before the work commences a Certificate of Insurance with respect to owned automobiles on ICBC Form No. APV 47 entitled "Confirmation of Insurance Coverage" and with respect to Non-Owned Automobiles including hired automobiles and Contractual Liability on ICBC non-owned automobile policy Form APV 29 (if non-owned automobile coverage is not included under the comprehensive general liability coverage) each signed by an authorized representative of the Insurance Corporation of British Columbia.

**24.3 Physical Loss or  
Damage With  
Respect to New  
Buildings under  
Construction  
and/or Major  
Additions to  
Existing Structures**

24.3.1 **Responsibility for Placing Insurance:**

The types of insurance required under this section will be provided and maintained at the expense of the City of Coquitlam during the term of the Contract and will be as follows unless otherwise changed by specific endorsement to these Insurance Specifications.

24.3.2 **Insurance Coverage Required:**

Builders Risk Completed Value "All Risks" Course of Construction Insurance. This policy will be written in the names of the City of Coquitlam and the Contractor with loss payable as their respective interests may appear.

24.3.3 **Responsibility of Contractor – Limitations of cover and deductibles:**

The insurance provided by the City of Coquitlam as described herein will not provide the Contractor with full protection against any and all kinds of loss or damage which may arise out of the Contract. It is, therefore, the responsibility of the Contractor to fully understand the scope of the cover provided with particular attention to the exclusions, limitations of cover and deductible provisions contained in the Insuring Agreements of the policies and it is further the responsibility of the Contractor to take out at the Contractor's expense, whatever other additional insurance the Contractor may consider necessary or desirable for his protection subject as hereinafter provided. The Contractor shall act in the same manner on insurance made available through the City of Coquitlam as he would if he had arranged such insurance himself.

24.3.4 **Responsibility of Contractor – Direct Damage Insurance:**

If the Contractor fails to do all or anything that is required of them concerning insurance, the City of Coquitlam may do what is required and any monies expended by the City of Coquitlam for that purpose shall be repayable and recoverable from the Contractor. Should any action, failure or negligence of the Contractor result in higher insurance costs being incurred by the City of Coquitlam, such additional costs shall be payable or recoverable from the Contractor.

24.3.5 **Responsibility of Contractor – Machinery and Equipment Belonging to Others:**

Unless otherwise directed by the City of Coquitlam in writing, the Contractor shall carry insurance covering loss or damage to construction machinery, tools and equipment owned by and/or on bare rental from a third party or parties and used by the Contractor in performing the work, which insurance shall be in a form satisfactory to the City of Coquitlam and having coverage in accordance with the actual cash value of such construction machinery, tools and equipment. Such policies shall also provide for subrogation to be waived against the City of Coquitlam. A certified copy of the policy shall be delivered to the City of Coquitlam not later than thirty days after the commencement of work under the Contract.

24.3.6 **Contractor's Waiver of Liability to Coquitlam:**

The Contractor hereby releases the City of Coquitlam from any and all liability for damages to the extent that such



damages are covered by the course of construction insurance referred to in Section 24.3 of these specifications.

24.3.7 **Liability of Contractor:**

Neither the providing of insurance by the Contractor or the City of Coquitlam in accordance with the requirements hereof, nor the insolvency, bankruptcy, nor failure of any insurance company to pay any claim accruing shall be held to waive any of the provisions of this Contract with respect to the liability of the Contractor or otherwise.

24.3.8 **Responsibility of Contractor for protection of work, persons and property:**

The Contractor and all persons employed by the Contractor or under their control, and all employees and subcontractors, shall use due care that no person or property is injured, and that no rights are infringed in the prosecution of the work. Contractors shall take particular care to protect the work against loss or damage caused by riot, vandalism or malicious mischief and shall be at the expense of the Contractor provide all necessary safeguards in the form of watchmen and/or watch dog protection to prevent loss or damage of this type. The payment of deductibles is the responsibility of the Contractor and if not paid by the Contractor such amounts shall be deducted by the City of Coquitlam from payment due to the Contractor. These deductibles will normally be \$250.00 each claim.

24.3.9 **Action to be taken in the event of loss or damage to the work covered by the Contract:**

When any loss or damage occurs to the work or to any materials and supplies on the site of the work, the Contractor shall remove any and all damaged or destroyed property and shall rebuild or replace the damaged or destroyed work, materials, or supplies and complete the work to the satisfaction of the Owner. For such removal, rebuilding, or replacing, the Contractor shall be entitled to receive from the Owner the amount of insurance monies received by the Owner pursuant to the said adjustment which amount shall be paid to the Contractor as the work of rebuilding or replacing proceeds, and in accordance with the Agreement. Damage or destruction of the whole or any part of the work shall not affect the rights and obligations of either party under the Agreement, except that in such event the Contractor shall be entitled to such reasonable extension of time to complete the work as the Architect and/or Contract Administrator may decide.

24.3.10 **Further responsibility of Contractor:**

Other than with respect to loss or damage arising out of insured risks and herein before specified, the Contractor shall be responsible for all loss or damage whatsoever which may occur on or to the works completed or otherwise, until such time as the entire works have been completed and the Notice of Acceptance has been issued by the Owner, except that loss or damage caused solely by an act of the Owner.

In the event of any loss or damage occurring, the Contractor shall on notice from the Owner immediately put the works into the condition it was immediately prior to such loss or damage, all at the Contractor's expense except as previously stated.

24.3.11 **Owner Not Responsible for Loss or Damage or Loss of Use of Property of Contractors and their Employees:**

The Owner will not be responsible for securing or paying for insurance of any kind other than as specified in Section 24.3 of these specifications nor will the Owner have any responsibility whatsoever for loss or damage from whatever cause occurring to property owned, leased, or otherwise in the possession of the Contractor, subcontractors or their employees including, without restricting the generality of the foregoing, machinery, equipment, tools, supplies, and clothing at the construction site or elsewhere including loss of use of same.

**24.4 Additional Insured**      24.4.1

**The Contractor shall ensure the following are named as "additional insured" on the liability policy for this contract:**

- The City of Coquitlam

The City may identify private properties that are directly affected by construction. If so, the Contractor shall include the legal owners of these properties named as "additional insured" on the liability policy for this contract.

**25.0 MAINTENANCE  
PERIOD**

**25.1 Correction of  
Defects**      25.1.4

***(Add new clause 25.1.4 as follows):***

The Owner is authorized to make repairs to defects or deficiencies if, ten days after giving written notice, the Contractor has failed to make or undertake with due diligence the required repairs. However, in the case of emergency where, in the opinion of the Owner, delay is not

reasonable, repairs may be made without notice being sent to the Contractor. All expenses incurred by the Owner in connection with repairs made pursuant to GC 25 shall be paid by the Contractor or may be deducted from the Maintenance Security, or other holdbacks. The Contractor shall promptly pay any shortfall.

**27.0 CONTRACTOR  
PERFORMANCE  
EVALUATION**

27.1

***(Add new clause 27.1 as follows):***

After the completion of the Contract, the Contractor will be evaluated on their performance of the Work. The evaluation will provide percentage scores on the following categories:

1. *Contract Administration*
2. *Construction Management*
3. *Schedule Management*
4. *Communications*
5. *Resource Management and Contractor Performance*
6. *Quality Management*

*An evaluation summary report may be issued to the Contractor with scores for each of these categories. Upon request, the Contractor may attend a meeting with the City to discuss the evaluation.*

*This internal evaluation may be reviewed for reference on subsequent tenders with the City. Evaluation scores can form part of the tender analysis and influence contract award decisions.*

*Evaluation Scores in categories that are below 50% may result in a suspension of tendering privileges with the City.*

**APPENDIX I**

**PERFORMANCE BOND**

NO. \_\_\_\_\_ \$ \_\_\_\_\_

KNOW ALL MEN BY THESE PRESENTS THAT

\_\_\_\_\_  
As Principal, hereinafter called the Principal, and

\_\_\_\_\_  
As Surety, hereinafter called the Surety, are held and firmly bound unto

\_\_\_\_\_  
As Obligee, hereinafter called the Obligee, in the amount of

\_\_\_\_\_ Dollars  
(\$                      )

lawful money of Canada, for the payment of which sum, well and truly to be made, the Principal and the Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has entered into a written contract with the Obligee, dated the \_\_\_\_\_

day of \_\_\_\_\_ 20\_\_\_\_, for

\_\_\_\_\_  
\_\_\_\_\_

in accordance with the drawings and specifications submitted, therefore, which contract, drawings and specifications and addenda thereto, to the extent provided for, are by reference made part hereof and are hereinafter referred to as the Contract.

NOW THEREFORE, THE CONDITION OF THIS OBLIGATION is such that, if the Principal shall promptly and faithfully perform said Contract (including any addenda thereto, provided such addenda do not collectively increase the amount to be paid to the Principal by more than twenty per cent (20%) of the amount of the Contract except with the written consent of the Surety) then this obligation shall be null and void; otherwise, it shall remain in full force and effect.

These Supplementary General Conditions must be read in conjunction with the General Conditions contained in the Master Municipal Construction Documents, Volume II, Printed 2009

Whenever the Principal shall be, and declared by Oblige to be, in default under the Contract, the Oblige having performed Oblige's obligations thereunder, the Surety may promptly remedy the default, or shall promptly:

1. Complete the Contract in accordance with its terms and conditions, or
2. Obtain a bid or bids for submission to Oblige for completing the Contract in accordance with its terms and conditions, and upon determination by Oblige and Surety of the lowest responsible bidder, arrange for a contract between such bidder and Oblige and make available as work progresses (even though there should be a default or a succession of defaults under the contract or contracts of completion arranged under this paragraph) sufficient funds to pay the cost of completion less the balance of the contract price; but not exceeding, including other costs and damages for which the Surety may be liable hereunder, the amount set forth in the first paragraph hereof. The term 'balance of the contract price', as used in this paragraph, shall mean the total amount payable by Oblige to Principal under the Contract less the amount properly paid by Oblige to Principal.

Any suit under this Bond must be instituted before the expiration of two (2) years from date on which the Notice of Acceptance under the Contract is issued.

The Surety shall not be liable for a greater sum than the specified penalty of this Bond.

No right of action shall accrue on this Bond to or for the use of any person or corporation other than the Oblige named herein or the heirs, executors, administrators, or successors of Oblige.

IN TESTIMONY WHEREOF, the Principal has hereto set its hand and affixed its seal, and the Surety has caused these presents to be sealed with its corporate seal duly attested by the signature of its Attorney-in-fact, this \_\_\_\_ day of \_\_\_\_\_ 20 \_\_\_\_.

SIGNED, SEALED and DELIVERED

In the presence of

)  
)  
)  
)  
)

\_\_\_\_\_  
PRINCIPAL

\_\_\_\_\_  
SURETY

## APPENDIX II

### **LABOUR AND MATERIAL PAYMENT BOND**

(Private Contracts – Trustee Form)

NO. \_\_\_\_\_

\$ \_\_\_\_\_

Note: This Bond is issued simultaneously with another Bond in favour of the Obligee conditioned for the full and faithful performance of the Contract.

KNOW ALL MEN BY THESE PRESENTS THAT

\_\_\_\_\_  
As Principal, hereinafter called the Principal, and

\_\_\_\_\_  
As Surety, hereinafter called the Surety, are, subject to the conditions hereinafter contained, held and firmly bound unto

\_\_\_\_\_  
As Trustee, hereinafter called the Obligee, for the use and benefit of the Claimants, their and each of their heirs, executors, administrators, successors and assigns in the amount of

\_\_\_\_\_ Dollars  
(\$ \_\_\_\_\_) lawful money of Canada, for the payment of which sum well and truly to be made, the Principal and the Surety bind themselves, their heirs, executors, administrators, successors and assigns jointly and severally, firmly by these presents.

SIGNED AND SEALED this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

WHEREAS, the Principal has entered into a written contract with the Obligee dated the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, for

\_\_\_\_\_  
\_\_\_\_\_  
which contract is by reference made a part hereof, and is hereinafter referred to as the Contract.

NOW, THEREFORE, THE CONDITION OF THIS OBLIGATION is such that, if the Principal shall make payment to all Claimants for all labour and material used or reasonably required for use in the performance of the Contract, then this obligation shall be null and void; otherwise it shall remain in full force and effect, subject, however, to the following conditions:

\_\_\_\_\_  
These Supplementary General Conditions must be read in conjunction with the General Conditions contained in the Master Municipal Construction Documents, Volume II, Printed 2009

1. A Claimant for the purpose of this Bond, is defined as one having a direct contract with the Principal for labour, material, or both, used or reasonably required for use in the performance of the Contract, labour and material being construed to include the part of water, gas, power, light, heat, oil, gasoline, telephone service or rental equipment directly applicable to the Contract provided that a person, firm or corporation who rents equipment to the Principal to be used in the performance of the Contract under a contract which provides that all or any part of the rent is to be applied towards the purchase price thereof shall only be a Claimant to the extent of the prevailing industrial rental value of such equipment for the period during which the equipment was used in the performance of the Contract. The prevailing industrial rental value of equipment shall be determined, insofar as it is practical to do so, in accordance with and in the manner provided for in the latest revised edition of the publication of the Canadian Construction Association entitled "Rental Rates on Contractors' Equipment" published prior to the period during which the equipment was used in the performance of the Contract.
2. The Principal and the Surety hereby jointly and severally agree with the Oblige as Trustee that every Claimant who has not been paid as provided for under the terms of his contract with the Principal before the expiration of a period of ninety (90) days after the date on which the last of such Claimant's work or labour was done or performed or materials were furnished by such Claimant, may as a beneficiary of the trust herein provided for, sue on this Bond, prosecute the suite to final judgment for such sum or sums as may be justly due to such Claimant under the terms of his said contract with the Principal and have execution thereon. Provided that the Oblige is not obliged to do or take any act, action or proceeding against the Surety on behalf of the Claimants or any of them to enforce the provisions of this Bond. If any act, action or proceeding is taken either in the name of the Oblige or by joining the Oblige as a party to such proceedings then such act, action or proceeding shall be taken on the understanding and basis that the Claimants or any of them who take such act, action or proceeding shall indemnify and save harmless the Oblige against all costs, charges and expense or liabilities incurred thereon and any loss or damage resulting to the Oblige by reasons thereof. Provided still further that subject to the foregoing terms and conditions, the Claimants or any of them may use the name of the Oblige to sue on and enforce the provisions of this Bond.
3. No suit or action shall be commenced hereunder by any Claimant:
  - a) unless such Claimant shall have given written notice within the time limits hereinafter set forth to each of the Principal, Surety and Oblige, stating with substantial accuracy the amount claimed. Such notice shall be served by mailing the same by registered mail to the Principal, Surety and Oblige at any place where an office is regularly maintained for the transaction of business by such persons or served in any manner in which legal process may be served in the Province or other part of Canada in which the subject matter of the contract is located. Such notice shall be given (i) in respect of any claim for the amount or any portion thereof required to be held back from the Claimant by the Principal under either the terms of the Claimant's contract with the Principal or under the Mechanic's Liens Legislation applicable to the Claimant's contract with the Principal whichever is the greater within one hundred and twenty (120) days after such Claimant should have been paid in full under the Claimant's contract with the Principal; (ii) in respect of any claim other than for the holdback or portion thereof referred to above within one hundred and twenty (120) days after the date upon which such claimant did

or performed the last of the work or labour or furnished the last of the materials for which such claim is made under the Claimant's contract with the Principal.

- b) after the expiration of one (1) year following the date on which Principal ceased work on the Contract including work performed under guarantees provided in the Contract.
- c) Other than in a court of competent jurisdiction in the Province or District of Canada in which the subject matter of the Contract or any part thereof is situated and none elsewhere, and the parties hereto agree to submit to the jurisdiction of such court.

4. The amount of this Bond shall be reduced by and to the extent of any payments made in good further and in accordance with the provisions which may be filed of record against the subject matter of the Contract, whether or not claim for the amount of such lien be presented under and against this Bond.

5. The Surety shall not be liable for a greater sum than the specified penalty of this Bond.

IN TESTIMONY WHEREOF, the Principal has hereto set its hand and affixed its seal, and the Surety has caused these presents to be sealed with its corporate seal duly attested by the signature of its Attorney-in-fact the day and year first above written.

SIGNED, SEALED and DELIVERED

In the presence of

)  
)  
)  
)  
)

\_\_\_\_\_  
PRINCIPAL

\_\_\_\_\_  
SURETY



## APPENDIX III

### CERTIFICATE OF INSURANCE

This Certificate issued to the City of Coquitlam is to certify that policies of insurance, as described below, have been issued to the Insured named below and are in force at this time. It is understood and agreed that thirty (30) days' prior written notice by registered mail of any material alterations, transfer, assignment or cancellation of any of the policies listed below, either in part or in whole, will be given to the holder of this Certificate.

- A. This Certificate is issued to: **City of Coquitlam**  
**3000 Guildford Way**  
Coquitlam, BC V3B 7N2
- Named Insured and Mailing Address:
- B. CONTRACT NUMBER AND/OR NAME Description of the Work:
- C. INSURANCE POLICY
- Name of Insurer:  
Policy Number:  
Effective Date:
- Liability Limit:  
Expiry Date:
- D. INSURANCE COVERAGE
- COMMERCIAL GENERAL LIABILITY** coverage is required to insure against liability from the activities arising out of operations or work in connection with the above-described project, including liability arising out of the use of City property.
- D.1 The minimum limit shall be \$5,000,000.00 inclusive per occurrence against bodily injury, personal injury and property damage.
- D.2 The City of Coquitlam, its employees, officers, agents and volunteers are added as Additional Insureds, but only with respect to operations conducted by or on behalf of the Named Insured in connection with the above-described project, operations or work.
- D.3 This insurance shall be primary as regards the City of Coquitlam, its employees, officers, agents and volunteers as Additional Insureds.
- D.4 Any deductible or reimbursement clause contained in the policy shall not apply to the City of Coquitlam and shall be the sole responsibility of the Named Insured.
- D.5 The insurance shall include the following coverages:
- D.5.1 Cross Liability Clause
- D.5.2 Non-Owned Automobile Liability
- D.5.3 Unlicensed Automobile Liability
- D.5.4 Blanket Contractual Liability
- D.5.5 Broad Form Property Damage Liability
- D.5.6 Owner's & Contractor's Protective Liability
- D.5.7 Products & Completed Operations Liability
- D.6 Indicate provision of special coverage for this project as required by the City:
- | YES | NO  | Special Coverage Description    |
|-----|-----|---------------------------------|
| ( ) | (X) | Shoring and Underpinning Hazard |
| ( ) | (X) | Pile Driving and Vibrations     |
| (X) | ( ) | Excavation Hazard               |
| ( ) | (X) | Demolition                      |
| ( ) | (X) | Blasting                        |

\_\_\_\_\_  
Authorized Signature and Stamp

\_\_\_\_\_  
Date

\_\_\_\_\_  
Name and Title

\_\_\_\_\_  
City' broker to return to City Representative

\_\_\_\_\_  
Department

These Supplementary General Conditions must be read in conjunction with the General Conditions contained in the Master Municipal Construction Documents, Volume II, Printed 2009



## APPENDIX IV

### PRIME CONTRACTOR DESIGNATION

Owner: CITY OF COQUITLAM  
Contractor: \_\_\_\_\_  
Contract / Permit #: **81456**  
Project / Workplace: **Culvert Replacement at Dewdney Trunk**

By signing this Prime Contractor Designation form, the Contractor hereby:

1. agrees to be, and accepts designation as, the "prime contractor" for the purposes of the Workers Compensation Act, R.S.B.C. 2019, c. 1 (the "Act") and the Occupational Health and Safety Regulation, B.C. Reg. 223/2022 (the "Regulation") in respect of the Project and Workplace noted above;
2. represents and warrants that the Contractor is qualified and capable to perform the duties of prime contractor and that the undersigned signatory has the authority to accept designation as prime contractor and to bind the Contractor;
3. accepts the duty and responsibility for ensuring the activities of employers, workers and other persons at the Workplace relating to occupational health and safety are coordinated and agrees to do everything that is reasonably practicable to establish and maintain a system or process that will ensure compliance with the Act and the Regulation in respect of the Workplace;
4. covenants and agrees to comply with the occupational health and safety provisions of the Act, the Regulation, any other applicable regulations under the Act, and any applicable orders;
5. acknowledges and agrees that the Owner has provided the Contractor the information known to the Owner that is necessary to identify and eliminate or control hazards to the health or safety of persons at the Workplace; and
6. agrees that the designation as prime contractor hereunder may not be assigned or revoked without the prior written consent of the Owner.

**Prime Contractor Name:** \_\_\_\_\_

**Prime Contractor Address:** \_\_\_\_\_

\_\_\_\_\_  
**Prime Contractor Signature** **Date**

\_\_\_\_\_  
**Print Name**

*Please return a signed copy of this designation to the City of Coquitlam, 3000 Guildford Way, Coquitlam, BC, V3B 7N2. If you have any questions, please contact the City of Coquitlam Health & Safety Manager at 604-927-3070.*

# ***Supplementary Contract Specifications***

---

These Supplementary Contract Specifications must be read in conjunction with the Specifications contained in the Master Municipal Construction Documents, Volume II, Printed 2009 and the City of Coquitlam Supplementary Specifications and Detailed Drawings

File #: 11-5330-20/81456/1 Doc #: 5286166.v1

---

Supplementary Specifications

to the  
MASTER MUNICIPAL SPECIFICATIONS  
Volume II – Platinum Book  
  
CONTRACT 81456  
Culvert Replacement at Dewdney Trunk

TABLE OF CONTENTS

The following Supplementary Specifications are to be considered part of the Specifications. These Supplementary Specifications take precedence over the Master Municipal Specifications.

SUPPLEMENTARY CONTRACT	
SPECIFICATIONS INDEX .....	Page 1

00 72 43S	Contract Specific Notations .....	SS 2 to SS 5
01 33 01S	Project Record Documents .....	SS 6
01 45 00S	Quality Control .....	SS 7 to SS 8
01 52 01S	Temporary Structures.....	SS 9
01 55 00S	Traffic Control, Vehicle Access and Parking.....	SS 10
01 57 01S	Environmental Protection .....	SS 11 to SS 12
01 58 01S	Project Identification .....	SS 13
03 30 20S	Concrete Wlaks, Curbs and Gutter .....	SS 14
31 11 01S	Clearing and Grubbing.....	SS 15
31 11 41S	Shrub and Tree Preservation .....	SS 16
31 22 01S	Site Grading .....	SS 17
31 22 16S	Reshaping Granular Roadbeds .....	SS 18
31 23 01S	Excavating, Trenching and Backfilling.....	SS 19
31 24 13S	Roadway Excavation, Embankment and Compaction .....	SS 20
31 37 10S	Rip Rap.....	SS 21
32 91 21S	Topsoil and Finish Grading .....	SS 22
33 40 01S	Storm Sewers.....	SS 23 to SS 24
33 44 01S	Manholes and Catchbasins .....	SS 25 to SS 26

CONTRACT SPECIFIC NOTATIONS

<b>1.00</b>	<b>CONTRACT SPECIFIC INSTRUCTIONS</b>	
<b>1.01</b>	<b>Coordination of Work</b>	The Contractor shall be responsible to consult with all affected businesses, residents, transportation companies regarding delays, detours, and any other works affecting any transit service in the area, and will be responsible to coordinate the works with other Contractors working in the area.
<b>1.02</b>	<b>Outside Agency Approval</b>	In accordance with the Contract Documents, the Contractor is responsible to consult with and obtain any approval required to meet and comply with all the conditions required from outside agency such as, but not limited to, BC One Call, Metro Vancouver, BC Hydro, Telus, Kinder Morgan, and Fortis BC in the area of the place of Work.
<b>1.03</b>	<b>Cooperation with Emergency and Maintenance Activities</b>	<p>The Contractor will be responsible to cooperate with regular maintenance or emergency vehicles and staff for access to the site when required including:</p> <ul style="list-style-type: none"> <li>• Fire, Police, and Ambulance</li> <li>• Waste Management (garbage pick-up)</li> <li>• City Utilities Maintenance (or representatives)</li> </ul>
<b>1.04</b>	<b>Waste-Collection Coordination</b>	<ol style="list-style-type: none"> <li>1. Contractor is responsible to accommodate all waste collection vehicles and cart pick up schedules throughout construction. Collection schedule can be found in <a href="https://www.coquitlam.ca/157/Collection-Calendar-Guidelines">https://www.coquitlam.ca/157/Collection-Calendar-Guidelines</a>.</li> <li>2. If waste collection will be impacted the contractor is responsible to: <ol style="list-style-type: none"> <li>a. Provide advanced notification to: <ol style="list-style-type: none"> <li>i. The City's Solid Waste staff at 604-927-3500 or <a href="mailto:wastereduction@coquitlam.ca">wastereduction@coquitlam.ca</a>; and</li> <li>ii. The City's Contract Administrator.</li> </ol> </li> <li>b. Provide access for collection trucks to closed streets due to road work; or</li> <li>c. Move waste carts for collection: <ol style="list-style-type: none"> <li>i. The Contractor is required to ensure each cart is labelled with the property address and returned to the correct address after collection (each cart has its own individual cart identification code and is specifically assigned to each property). <b>Contractors will be responsible for the costs to replace missing carts.</b></li> <li>ii. The Contractor shall ensure that garbage brought out by residents is picked up by garbage collection company.</li> </ol> </li> </ol> </li> <li>3. Contractor's Request for Change in Collection Time (e.g. PM to AM): <ol style="list-style-type: none"> <li>i. The Contractor must provide residents with as much notice as possible – minimum 5 working days.</li> <li>ii. The contractor must follow all conditions of Clause 1.04 and is responsible to deal with any missed collections. For example, taking garbage to the United Boulevard Recycling and Waste Centre or covering the cost associated for any missed collection to be rescheduled.</li> </ol> </li> </ol> <p>Questions: <a href="mailto:wastereduction@coquitlam.ca">wastereduction@coquitlam.ca</a></p>
<b>1.05</b>	<b>Site Safety</b>	The Contractor is responsible to ensure the construction site is safe at all times for workers, pedestrians, and vehicle traffic. During non-working hours, the Contractor must ensure that the site has all potentially hazardous areas appropriately identified and protected, and also must provide appropriate signage, lighting, and markings for the direction of vehicle and pedestrian traffic, all to ensure the safety of the public. Supply and use of this equipment is considered incidental to the contract.

CONTRACT SPECIFIC NOTATIONS

Manhole lids, valve boxes and other appurtenances within the roadway that may present a traffic hazard during construction must be clearly marked for traffic.

Manhole lids left raised in preparation for paving must have a rubberized protector ring for traffic safety. Supply and use of this equipment is considered incidental to the contract.

**1.06 Lane Closure Restrictions**

Refer to: **Appendix A: Traffic Management Detail Specifications.**

A Road and Sidewalk Closure Permit is required for each instance of closure and will be valid for a maximum period of one (1) week and, if still necessary, re-submittal of a Road and Sidewalk Closure Request is required.

A copy of the approved Road and Sidewalk Closure Permit must be held on site by both the Site Superintendent and the person/company responsible for the traffic control implementation

The Contractor must take the above information into account in the preparation and submission of the Tender.

Costs to complete the works taking the above restrictions into consideration shall be incidental to work described in other sections.

**1.07 Schedule of Work**

All work under this Contract is to be completed within the designated Contract Duration. The Contractor must provide sufficient resources in a continuous effort and site presence to complete all the work within the allotted time. As set out in the MMCD the Contractor must provide updates to the construction schedule monthly, preferably biweekly.

**1.08 Survey Layout**

The Contractor is responsible to provide all survey layout for construction to ensure the construction meets the design specifications and/or elevations as shown on the Contract Drawings or as amended on-site by the Contract Administrator. The Contract Administrator will provide AUTOCAD drawing file to the Contractor.

**1.09 Location of Existing Utilities**

Before commencing any Work at the Place of the Work, the Contractor shall be responsible to locate in three dimensions all underground utilities and structures indicated on the Contract Documents as being the Place of the Work. The Contractor shall also be responsible to consult with all the utility corporations that provide electricity, communications, gas or other utility services in the area of the Place of Work, to locate all underground utilities for which they have records. The Contractor shall also locate in three dimensions any other utilities or underground structures that are reasonably apparent in an inspection of the Place of the Work. Cost to do the pre locating of all the utilities will be incidental.

The contractor is responsible to verify the depth and location of all utilities (watermains, storm mains, sanitary mains & etc.), including outside agency utilities (i.e. Fortis BC Mains, Kinder Morgan Pipeline, BC Hydro & Metro Vancouver.) and service connections (water, storm & sanitary services at the mains & property lines) by hand digging or by Hydro-Vac in the presence of the Inspector. Contact BC One for location of outside agency utilities.

Pre-locates must be completed as soon as possible after award of the contract so changes can be completed by the Engineer prior to site construction. Contact BC One for location of outside agency utilities.

The contractor will not receive any compensation or allowance for delays if work is halted due to utilities & services connections not located prior to commencing construction.

City of Coquitlam does not guarantee water, storm or sanitary services connections are perpendicular to the mains or property lines, the contractor will not receive any

CONTRACT SPECIFIC NOTATIONS

compensation for the time to locate these connections or for exposing hidden services at the property lines.

Payment for this work will be treated as incidental to payment for work described in other Sections.

**1.10 Manholes & Valves**

Access to manholes and valves must be maintained at all time for city utilities crews and external utility companies. In case of an emergency the cost for exposing any buried manhole or valve covers during construction will be paid by the contractor.

**1.11 Utility Adjustments -  
City Infrastructure and/or  
Other Agency  
Infrastructure**

The Contractor is responsible for adjusting all utilities, belonging to Coquitlam and/or other agencies that are affected by the road works. All adjustments to utilities must be completed to the satisfaction of the utility owner. Utility adjustment will be considered incidental to the contract unless otherwise noted in the Contract Documents.

The Contractor should note that certain utility owners may decide to complete their own adjustments. The Contractor will be required to cooperate with any utility company providing their own adjustments.

The Contractor shall be responsible to contact the appropriate utility company within minimum of seventy-two (72) hours of the work. No adjustment shall be made without the written approval of the utility company.

All manholes must be vertically adjusted a minimum of twenty four (24) hours prior to paving.

**1.12 Temporary Asphalt  
Pavement Restoration**

The Contractor will be required to backfill all trenches (in paved areas) and place a temporary patch (50mm of hot mix asphalt), as per Coquitlam Standard Drawing COQ-G4, the same day excavation is made, unless otherwise approved by the Contract Administrator.

**1.13 Accesses**

The Contractor is responsible to maintain all business/residential vehicles and pedestrian accesses open at all times, the contractor may provide temporary accesses if the affected owner agrees. All costs associated with temporary accesses will be at the contractor's expense.

**1.14 Verification of  
Dimensions and  
Quantities**

Before proceeding with work, Contractor is to visit site and check and verify dimensions and quantities. Report variations between drawings and site conditions to the Contract Administrator before proceeding with work.

**1.15 Precautions**

Protect areas under construction from damage caused by excessive erosion, flooding, heavy rains, etc. Repair or replacement of unprotected damaged areas and as directed by the Contract Administrator will be at no cost to the Owner.

**2.00 CONSTRUCTION ACTIVITY**

**2.01 Notice to Residents and  
Businesses**

Residents and businesses affected by the proposed construction must be notified by the Contractor at least 7 days prior to commencement of works and be provided with the construction schedule and Contractor's contact information.

**2.02 Site Clean-up During  
Construction and End of  
Construction**

The Contractor will be responsible for the complete clean-up of the work site during construction & at the end of construction and prior to the Substantial Performance review. This work is considered incidental to the Contract.

The work will include cleaning of all catch basins periodically or as directed by the Contract Administrator within the Work area, or nearby location as affected by the Work, regardless of the condition of the catch basins prior to starting the Work. All cleaning is to be performed by vacuum truck to the satisfaction of the Contract Administrator and will include off-site disposal of waste material.

Payment for this work will be treated as incidental to payment for work described in other Sections.

**3.00 MANDATORY MEETINGS  
AND CONTRACTOR  
REPRESENTATIVES AND  
SUBCONTRACTORS**

**3.01 Pre-Construction Meeting  
Requirements**

After the Award of the Contract, the Contractor (Project Manager & Superintendent) will be required to attend a Pre-Construction Meeting with the Contract Administrator and provide all necessary information required by the Contract Administrator prior to provision of a Notice to Proceed. Items required to be provided at the meeting include:

1. A Detailed Construction Schedule showing the start date & completion date and the durations of major work components showing how all work will be completed within the Contract Duration.
2. Construction Staging Plan providing information & details on the number of stages being proposed by the contractor. This plan will be reviewed and must be approved prior to commencing construction.
3. Proof of insurance
4. Performance Bond and Labour and Materials Payment Bond
5. WCB Clearance Letter and copy of Notice of Project
6. City of Coquitlam Business License
7. A copy of portions of your Health and Safety Plan including the Title Page, Table of Contents, and portion showing latest revision date.
8. ESC (Erosion and Sediment Control) Plan

**3.02 Contract Schedule,  
Contract Duration, and  
Charges**

A detailed, realistic construction schedule for this project will be required to be presented at the pre-construction meeting. The schedule must show major components and durations. All work under this project is to be completed within the designated Contract Duration as contained in the signed **Contract Agreement**, or as formally amended.

**3.03 Contract Superintendent  
and Subcontractors**

In compliance with the **MMCD General Conditions, Section 4.7, Superintendent**, the Contractor shall have a competent senior representative, (the "Superintendent") in **FULL TIME attendance** at the Place of Work while work is being performed for the duration of the contract. **This (FULL TIME) attendance is also required when work is being performed by Subcontractors.**

Work done by Subcontractors is to be directed by the Superintendent and monitored on site ensuring conformance to the Contract Documents and other particular direction to the Superintendent by the Contract Administrator. The Owner is not responsible for the direction of Subcontractors.

**3.04 Changes of Contractor  
Representatives &  
Subcontractors**

The Superintendent and Subcontractors indicated in the Form of Tender shall not be changed unless:

1. The Owner requests a replacement
2. The Contractor submits an application for a change, in writing, to the Contract Administrator with the change being approved in writing.

**END OF SECTION**



**1.0 GENERAL**

**1.3 Submission**

Delete 1.3.2 and  
replace with the  
following

Submit one copy of an accurate project record document in final form prior to applying for Substantial Performance including any video report. Record documents to include changes in the Issued for Construction Drawings, new elevation & location of all walkways/sidewalks, all utilities, pipe, culvert, manhole rim, catchbasin rim, vaults, valve boxes and inverts affected by the work. Legal Holdbacks will not be released until record drawings have been submitted and accepted by the Contract Administrator.

**END OF SECTION**

**1.0 QUALITY**

The Contractor shall provide a final product conforming to the Contract Documents and the intent of the work. The work is to be accurate to the dimensional and tolerance requirements of the contract.

Payment will be subject to adjustments based on quality assurance tests performed by the Contract Administrator.

**1.1 Quality Control (QC) by Contractor**

**The MMCD (2009) definition of "Quality Control" is the process by which the Contractor checks specific materials, products, and workmanship to ensure strict conformance with the Contract Documents.**

The Contractor is fully responsible for quality control of the materials, production, and construction processes. Quality control tests shall be performed by the Contractor, at their own expense, to ensure that products meet the contract specifications.

Failure by the Contractor to conduct adequate quality control testing during production and construction will negate the Contractor's ability to appeal the quality assurance tests used for acceptance/rejection of the work.

Under no circumstances will QC test results produced after completion of the Quality Assurance (QA) results be considered for appeal purposes

Any changes in the Work with respect to the location, grade, or line shall be approved in advance by the Contract Administrator. Failure to notify the Contract Administrator of changes in writing may result in rejection of Work.

**1.2 Inspection of Work, Quality Assurance, and Material Testing, by the Owner**

**The MMCD (2009) definition of "Quality Assurance" means the process by which the Owner evaluates if the work is being constructed in accordance with the Contract Documents. This definition will be used for this contract**

The *Contract Administrator* will provide construction review through spot inspections and spot materials testing for Quality Assurance.

**Any materials testing results indicating a non-conformance to the Contract Documents will require construction corrective action by the Contractor.**

**All subsequent testing to corrective action to verify conformance to the Contract Documents will be the full responsibility of the Contractor.**

Inspection review by the Owner will not relieve the Contractor from providing a product that meets or exceeds the requirements of the Contract Documents.

**1.3 Inspection**

Materials testing shall be as described in MMCD General Conditions, Section 4.12 with the following change:

Delete Section 4.12.2(a) and insert the following:

Where the MMCD specification clauses for Inspection and Testing indicate the Contract Administrator will arrange for all testing for work described in this section will be amended to read The Contractor will arrange for and pay for all testing for work described in this section. The testing shall take place at the following prescribed rates and as directed by the contract administrator. The contract administrator has the authority to call for testing, up to the rates and frequencies specified, at the Contractors cost.

All testing covered under this item shall be performed by a CSA/CCIL certified laboratory and technicians with copies of all test results to be sent directly to the Contract Administrator. Re-testing resulting from failed first tests shall be at the Contractors expense.

- 1.4 Survey Layout** All Survey Layout will be completed by the Contractor in accordance with the Contract Drawings and Coordinate System set out within them. The Contractor will be provided digital AutoCAD files but shall be responsible to confirm elevations and tie in locations and report any discrepancies prior to construction.
- 1.5 Testing** Contractor shall carry out inspection and testing (QC) to ensure compliance with Contract Documents. Contractor shall submit test results within one week of testing to the Contract Administrator.
- The Contractor shall provide test results prior to the preparation of the payment certificate.
- 1.6 Contractors Responsibilities** Furnish labour and facilities to:
1. Provide access to work to be inspected
  2. Facilitate inspections and tests
  3. Make good work disturbed by inspection and tests
- 1.7 Access to Work** Allow inspection testing agencies access to Work.
- 1.8 Tests** Test rates and frequencies (excluding failed tests), when not defined in the MMCD or Detail Specifications Sections shall be at the following frequencies:
1. Trench Backfilling and Compaction
- 1.1 Compaction: 1 test / 10 lm / 300mm lift
- 1.2 Sieve: 1 test / placed material / 50 m<sup>3</sup>
2. Granular Base
- 2.1 Compaction: 1 test / 500m<sup>2</sup> / 100mm depth of granular base
- 2.2 Sieve: 1 test / placed material / 100 m<sup>3</sup>
3. Granular Subbase
- 3.1 Compaction: 1 test/500m<sup>2</sup> / 0.15m depth of granular subbase
- 3.2 Sieve: 1 test / placed material / 100 m<sup>3</sup>
4. Embankment (Subgrade)
- 4.1 Compaction: 1 test/ 50m<sup>2</sup> / 0.15m depth of fill
- 4.2 Sieve: 1 test / placed material / 100 TONNES
5. Asphalt
- 5.1 Marshall test: 1 test per 250 TONNES placed per mix specified, min. 1 test / day  
ASTM D1559, D3203, C117, C136
- 5.2 Superpave: 1 test per 250 TONNES placed, min. 1 test / day  
CAI-SP2, ASTM D3203, C117, C136
- 5.3 Cores: 1 per 500 m<sup>2</sup>/lift
- 5.4 Continuous asphalt density testing during paving.
6. Subgrade Preparation
- 6.1 Compaction & Moisture: 1 test / 500 m<sup>2</sup>
7. Concrete Tests
- 7.1 Air, Slump & 1 Set Cylinders: 1 test / 10 m<sup>3</sup>, min. 1 set / day
8. Reclaimed Materials
- 8.1 Compaction: 1 test/500m<sup>2</sup> / 0.15m depth of reclaimed materials
- 1.9 Measurement for Payment** Payment for all work performed under this section will be incidental to payment for work described in other Sections

**END OF SECTION**

**1.0 GENERAL**

**1.6 Payment**

Delete 1.6.1 and  
replace with the  
following

Payment for all work described in this section will be incidental to  
payment for work described in other Sections unless otherwise  
shown in Schedule of Quantities and Prices.

**END OF SECTION**

1.0	GENERAL	Add 1.0.6	<p>The <i>Contractor</i> is responsible for all temporary traffic control on the streets required for completion of the work. The <i>Contractor</i> will be responsible to provide a Traffic Management Plan (TMP) for approval (5) five working days prior to any lane closures taking place. TMP is to be prepared by a professional certified by the American Traffic Safety Services Association.</p> <p>The TMP shall outline the approach to traffic management, show recognition and minimization of risks indicates signing locations, identify Traffic Control Persons (TCP) stations, show lane shifting and proposed closures.</p>
		Add 1.0.7	<p>A Road and Sidewalk Closure Permit is required from Coquitlam for all work affecting pedestrian and traffic flow related to construction. A permit is required for each specific construction interference with pedestrian and traffic flow. The Contractor must follow the approved TMP. Any changes to this TMP must be submitted to City's Traffic Operations for approval. The road and sidewalk closure permit form can be obtained for use from the City's website at</p> <p><a href="http://www.coquitlam.ca/city-services/licenses-and-permits/road-and-sidewalk-closure-permit">http://www.coquitlam.ca/city-services/licenses-and-permits/road-and-sidewalk-closure-permit</a>.</p>
		Add 1.08	Refer to Appendix A – Traffic Management Detail Specifications
1.4	Traffic Control	Add 1.4.9.3.1	<p>The <i>Contractor</i>, as required by the <i>Contract Administrator</i> and the City, is to supply Construction Zone information signs (stationary), refer to MMCD 01 58 01 for the required identification signage.</p> <p>The <i>Contractor</i> is responsible for the removal of the signs at the completion of the work.</p>
		Delete 1.4.10.1.3 and replace with the following	When workmen or equipment are employed over travelled way over brow of hills, around sharp curves or at other locations where oncoming traffic would not otherwise have adequate warning.
1.5	Measurement for Payment	Delete 1.5.1 and replace with the following	<p>Payment for all work performed under this section including submission of Traffic Management Plan (TMP), Traffic Control Persons (TCP) &amp; all temporary traffic signs, devices as required for traffic, trail users &amp; pedestrian safety; and all other items described in the Traffic Regulation Section, and all labor, material, equipment and work described under <b>Appendix A: Traffic Management Detail Specifications</b> shall be treated as incidental to payment for work described in other Sections unless shown otherwise in the Schedule of Quantities and Prices.</p> <p>When shown in the Schedule of Quantities and Prices, payment for items used for only a fraction of a month will be paid prorata.</p>

END OF SECTION

1.0 GENERAL

1.0.3 Erosion and  
Sediment Control  
Supervisor

Add 1.0.3

The Erosion and Sediment Control (ESC) Supervisor is the Qualified Professional who is experienced in implementing ESC Plans and who is responsible for the inspection and monitoring of ESC Facilities to ensure these are installed and maintained in accordance with the ESC Plan, and if necessary, are modified during construction to ensure compliance with the Stream and Drainage System Protection Bylaw No. 4403, 2013.

1.2 Temporary Erosion  
and Sediment  
Controls

Delete 1.2.1 and  
replace with the  
following

Properly drain all portions of the site. Protect the site and the watercourses to which it drains, directly or indirectly, against erosion and siltation in accordance with a Sediment Control Plan under the City of Coquitlam Stream and Drainage System Protection Bylaw No. 4403, 2013 during construction and until the maintenance period is completed. Ensure no silt, gravel, debris or other deleterious substance resulting from construction activity discharges into existing drainage systems or watercourses or onto highways or adjacent property. The *Contractor* is responsible for all damage that may be caused by water backing up or flowing over, through, from or along any part of the work or otherwise resulting from his operations.

Keep existing culverts, drains, ditches and watercourses affected by the work clear of excavated material at all times. When it is necessary to remove or alter any existing drainage structure, provide suitable alternative measures for handling the drainage. Adequately support culverts and drainpipes across trenches to prevent displacement and interference with the proper flow of water due to trench settlement.

The Contractor shall submit a **Dewatering and Site Isolation Plan** to the Contract Administrator for review and approval. The Dewatering and Site Isolation Plan shall outline the Contractor's methodology for dewatering / isolating the work site(s) as well as a schedule outlining the timing of dewatering and flow diversions. The Contractor must submit the plan at least five (5) working days prior to any scheduled diversion(s). Dewatering and isolation systems shall not be solely relied on during non-working hours. Provisions must be made to allow safe conveyance of flow during non-working hours. The Contractor is solely responsible for any repairs that may be required following such an event.

Sweep streets, and clean catch basins, manhole sumps, detention tanks, and maintain siltation controls as often as the *Contract Administrator* and the City deems necessary.

Follow all Federal and Provincial regulations and guidelines respecting protection of fish, fish habitat, and watercourses.

Delete 1.2.2.2 and  
replace with the  
following

Do not operate construction equipment in watercourses.

Add 1.2.2.9

In any Watercourse, or In-Stream Works:

- .1 Prior to any work, Erosion and Sediment control measures should be in place; and
- .2 Fish salvage completed by Environmental Monitor; and
- .3 Temporary water passages or other approved means of handling waterflow in creeks installed to prevent or


minimize any impact to fish and aquatic habitat as approved by Contract Administrator.

Failure of the Contractor to properly address concerns relating to this Section and **Construction Mitigation Plan** as described in **Appendix D** will result in shut-down of the work. No claim will be accepted by the Owner for costs associated with this work shut-down.

- |     |  |   |   |
|-----|--|---|---|
| 1.4 | <b>Environmental Protection</b>              | Add 1.4.3.5                                 | Immediately contain and clean up any leaks and spills of prohibited materials at the <i>Place of Work</i> .   |
|     |  | Add 1.4.3.6                                 | Ensure that a well-stocked spill kit is on-site at all times and that the <i>Contractor's</i> employees are familiar with appropriate spill response techniques.  |
|     |  | Add 1.4.3.7                                 | Immediately notify the <i>Contract Administrator</i> and the City of any leaks or spills of prohibited materials that occur at the <i>Place of Work</i> .   |
|     |  | Add 1.4.3.8                                 | Ensure that any fuel stored on-site is located at least 15 metres from the nearest stream, and is placed within a bermed and lined area, in order to prevent leaks or spills into the environment.  |
|     |  | Add 1.4.3.9                                 | Ensure that no equipment fueling or servicing is conducted within 15 metres of a stream.  |
| 1.6 | <b>Measurement and Payment</b>               | Delete 1.6.1 and replace with the following | <p>Lump sum payment for Erosion and Sediment Control includes site isolation, supply, installation, maintenance and clean-up of all erosion and sediment control measures necessary to meet the Sediment Control Plan and City of Coquitlam Stream and Drainage System Protection Bylaw No. 4403, 2013 requirements, removal and disposal of deposited material, supply and installation of temporary water passages, pumps, hoses, bypass or other approved means of handling waterflow in any watercourse as approved by Contract Administrator, erosion control blankets and removal of all said works following the completion of the maintenance period; and</p> <p>All labour, materials, and equipment required to supply and install the Work as specified in this Section, and all labour, materials and equipment required for implementation of environmental notes as described in contract drawings and as described in Appendix B – Construction Mitigation Plan.</p> |
| 1.9 | <b>Archaeological / Historical Resources</b> | Add 1.9                                     | Immediately cease work and inform the <i>Contract Administrator</i> and the City, if any archaeological or historical resources are encountered during construction. Leave these resources in place and do not disturb them in any way.   |

**END OF SECTION**

1.1	Section 01 58 01 includes	Add 1.1.3	Work described in Appendix A – Traffic Management Detail Specifications.
1.3	Measurement and Payment	Delete 1.3.1 and replace with the following	Payment for the installation of 1.2m x 1.2m static construction notification signs (shown below) includes supply, placement & removal and will be incidental to payment for work described in other Sections, unless shown otherwise in the Schedule of Quantities and Prices.

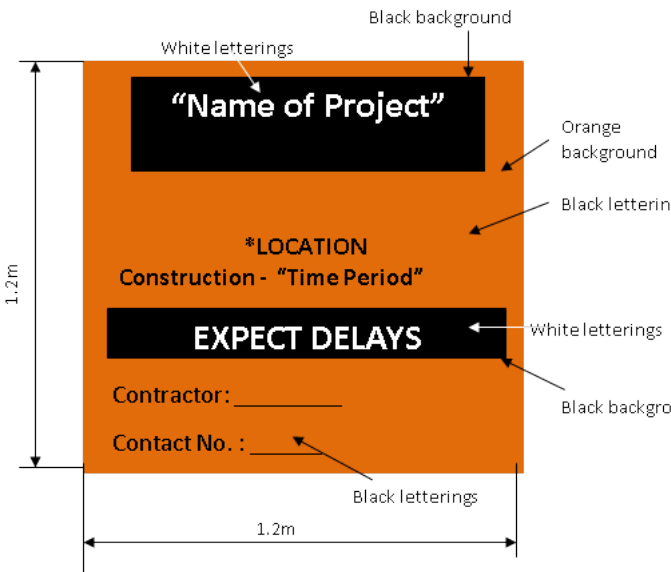

Add 1.3.2	Payment for changeable message signs (CMS) including supply, placement, communication management & removal as required for traffic & pedestrian safety and as shown in in Appendix A – Traffic Management Detail Specifications will be incidental to payment for work described in other Sections, unless shown otherwise in the Schedule of Quantities and Prices.
-----------	--

When shown in the Schedule of Quantities and Prices, payment for CMS used for only a fraction of a month will be paid prorata.

END OF SECTION



1.4	<b>Measurement and Payment</b>	Delete 1.4.3 and replace with the following	<p>Payment for machine placed or hand formed C5 wide base concrete curb, including granular subbase &amp; base, includes supply and placing of the concrete curb and gutter, tie-ins, transitions, subgrade preparation, compaction, saw cutting, and will cover all straight and curve sections and will be made separately for each specified type.</p> <p>Payment for excavation, removal and disposal of excavated material will be incidental to payment for work described in other Sections.</p>
		Delete 1.4.5 and replace with the following	<p>Payment for concrete sidewalks includes supply and installation, saw cutting, granular base and subbase, field fit and adjustments, subgrade preparation under the concrete sidewalks, and will be made separately for each specified thickness and type of finish.</p> <p>Payment for excavation, removal and disposal of excavated material will be incidental to payment for work described in other Sections.</p>
2.1	<b>Materials</b>	Delete 2.1.5.1 and replace with the following	<p>Hand-formed and hand-placed concrete:</p> <p>Slump: 80 mm Air entrainment: 5 to 8%. Maximum aggregate size: 20 mm. Minimum cement content: 335 kg/m<sup>3</sup>. Minimum 28 day compressive strength: 32 MPa.</p> <p>Add 2.1.7</p> <p>Tactile warning surface tile shall be replaceable cast-in-place style. Truncated domes shall be in square grid pattern with a 5 mm nominal raised height, base diameter of 23 mm and top diameter of 11.5 mm. Dome spacing range shall be between 40 mm – 60 mm.</p> <p>Color of the panel shall be Federal Yellow (Y) per US Federal Standard 595B Table IV, Color No. 335.</p> <p>Minimum size of the panel shall be 600 mm by 1200 mm.</p>
3.0	<b>EXECUTION</b>		
3.5	<b>Concrete Placement</b>	Delete 3.5.9 and replace with the following	<p>The <i>Contractor</i> is responsible for adjusting all utility manhole frames and valve boxes, belonging to Coquitlam and/or other agencies that are affected by the road works. All adjustments to utilities must be completed to the satisfaction of the utility owner. Riser rings will not be accepted.</p> <p>The <i>Contractor</i> should note that certain utility owners may decide to complete their own adjustments. The <i>Contractor</i> will be required to cooperate with any utility company providing their own adjustments.</p> <p>The <i>Contractor</i> shall be responsible to contact the appropriate utility company within a minimum of seventy-two (72) hours of the work. No adjustment shall be made without the written approval of the utility company. <u>All manholes must be vertically adjusted a minimum of twenty-four (24) hours prior to concrete placement.</u></p>
3.9	<b>Expansion Joints</b>	Delete 3.9.1 and replace with the following	<p>Form transverse expansion joints at both ends of curb returns and at maximum spacing of 9.0 m for sidewalks, 30.0 m of curb and gutter, at each end of driveway crossing, at tangent point of circular work, and on either side of catch basins.</p>

END OF SECTION

**CLEARING AND GRUBBING**

- |            |                                |   |   |
|------------|--------------------------------|---|---|
| <b>1.2</b> | <b>Definitions</b>             | Add 1.2.5                                   | <p>Trimming of trees, hedges and shrubs, including along construction access route(s) as identified in the approved Construction Access Plan, is included with Clearing and Grubbing. Co-ordinate with property owners and use the services of a certified arborist when necessary. Generally trees, bushes and shrubs shall be cleared for the full width of the work, within the construction limits, with the extent of clearing minimized.</p>  |
| <b>1.4</b> | <b>Measurement and Payment</b> | Delete 1.4.1 and replace with the following | <p>Payment for all clearing and grubbing will be incidental to payment for work described in other Sections, unless shown otherwise in the Schedule of Quantities and Prices. Payment includes removal and disposal of all branches, stumps, trees, timbers and vegetation to complete the work as shown on the Contract Drawings or as directed by the Contract Administrator. Works include cutting of branches &amp; trees as required to create the necessary clearance to accommodate the construction</p> <p>Payment includes removal and offsite disposal of all trees, roots, vegetation, organic matter (to a depth of 0.5m), invasive species (except Japanese knotweed), stumps and topsoil stripping and disposal that are located within the work area(s).</p> <p>Payment includes trimming of small branches from trees or hedges as required, branch cutting/pruning to have a clean cut flush to branch collar and use of an approved tree paint to repair damage to surviving vegetation where branches have been removed.</p> |
| <b>3.5</b> | <b>Removal and Disposal</b>    | Add 3.5.6                                   | <p>The Contractor shall remove all invasive plant species at the work sites and dispose properly on an approved location.</p>   |

**END OF SECTION**

SHRUB AND TREE PRESERVATION

<b>1.3</b>	<b>Measurement and Payment</b>	Delete 1.3.1 and replace with the following	Payment for all work performed under this section will be incidental to payment for work described in other Sections, unless shown otherwise in the Schedule of Quantities and Prices,
<b>2.0</b>	<b>PRODUCTS</b>		
<b>2.1</b>	<b>Materials</b>	Add 2.1.10	Protective Fencing: Posts - Pressure treated wood 100 mm dia.; Post to be 1.8 m to 2.0m in height at 2.0 m O.C. Snow fence as per Coquitlam Approved Products List; Flagging Tape - 4" Orange glow - 'Tree Retention Area'.
<b>2.0</b>	<b>EXECUTION</b>		
<b>3.1</b>	<b>Existing Trees</b>	Add 3.1.7	The <i>Contractor</i> is responsible to minimize damage to all trees which are to remain.
		Add 3.1.8	The <i>Contractor</i> will be responsible for all claims and costs including the cost of examination by an Arborist, repair, removal and replacement of trees, as required by the Arborist, the <i>Contract Administrator</i> and the City for tree damage where proper notification was not received from the <i>Contractor</i> . Damage will be assessed based on the International Society of Arboriculture Guidelines. The term shall be for a period of one year following the date of Substantial Performance of the <i>Work</i> .
		Add 3.1.9	Place protective fencing/barricades as detailed on Coquitlam Standard Detail Drawings COQ-R26 and COQ-R27. <i>Contractor</i> shall maintain fence in good condition during construction.
		Add 3.1.10	When work is to be performed inside fenced areas, <i>Contractor</i> shall take care to avoid damage to existing vegetation. Work to be done inside areas of existing vegetation to be retained includes: <ul style="list-style-type: none"> <li>.1 Removal of isolated trees as directed by the <i>Contract Administrator</i> and the City.</li> <li>.2 Selective pruning and tree removal at edges to create tidy and well-shaped forest edge.</li> <li>.3 Placing planting soil and planting of trees.</li> </ul>
		Add 3.1.11	Do not park, service or fuel vehicles within the vegetation retention areas.
<b>3.4</b>	<b>Pruning</b>	Add 3.4.2	Do not cut roots or branches of retained trees without approval of the <i>Contract Administrator</i> and the City.

END OF SECTION

**SITE GRADING**

**1.4      Measurement and      Add 1.4.9  
             Payment**

Payment for all work performed under this section including final grading and shaping of creek bank and slopes, fine grading and shaping to design grades and elevations and compaction of the slope face and includes site grading restoration of all affected areas shall be treated as incidental to payment for work described in other Sections unless shown otherwise in the Schedule of Quantities and Prices.

**END OF SECTION**

- |            |                                    |   |   |
|------------|------------------------------------|---|---|
| <b>1.4</b> | <b>Measurement and<br/>Payment</b> | Delete 1.4.1 to 1.4.4<br>and replace with 1.4.1<br>with the following | Payment for all work performed under this Section will be incidental<br>to payment for work described in other Sections unless shown<br>otherwise in the Schedule of Quantities and Prices. |
|------------|------------------------------------|---|---|

**END OF SECTION**

**1.0 GENERAL**

**1.8 Limitations of Open Trench**

1.8.1  
Replace last sentence  
with the following

If circumstances do not permit complete backfilling of all trenches, and where permitted by the *Contract Administrator* and the City, adequately protect all open trenches or excavations with approved fencing or barricades and, where required, with flashing lights.

**1.10 Measurement and Payment**

Add 1.10.9

Payment for coordination and preparation in support of the 168mm gas main relocation includes excavation as specified in the contract drawing. Payment includes coordination with Fortis BC, import backfill, compaction to 95% modified proctor density, support of existing pipe, culvert, dewatering, trench support, removal and disposal of excavated material. Payment for supply and installation of temporary water passages, pumps, hoses, bypass or other approved means of handling waterflow in any watercourse as approved by Contract Administrator will be incidental to Section 01 57 01S, Clause 1.6.1.

Payment includes maintaining traffic control support until gas main relocation by Fortis is completed (approx. two days).

No payment will be made under this item carried out as part of operation of items described in other Sections.

**2.0 PRODUCTS**

**2.2 Use of Specified Materials**

Delete 2.2.1.2

Delete Pit Run Sand

Delete 2.2.3.3

Delete Pit Run Sand

**3.0 EXECUTION**

**3.3 Excavation**

Delete 3.3.1.2 and  
replace with the  
following

Connections to existing waterworks systems are to be made by the *Contractor* under the inspection / supervision of the *Contract Administrator* and the City.

**3.6 Surface Restoration**

Delete 3.6.2.4 and  
replace with the  
following

Restore lawns with approved topsoil and sod to match existing lawn.

Delete 3.6.3.1 and  
replace with the  
following

Restore surface with a minimum 100 mm of 19 mm granular road base material.

Delete 3.6.7.5 and  
replace with the  
following

Restore Pavement as detailed on Coquitlam Standard Detail Drawing COQ-G4. Temporary patch shall be a minimum thickness of 50 mm thickness. Permanent restoration to existing asphalt thickness (minimum of 75 mm) with a 35 mm key where existing thickness permits. A 50 mm key is required on Arterial and Collector Roadways. Dry if necessary and paint clean, dry edge with asphalt emulsion (tack coat).

**END OF SECTION**

**1.8 Measurement and Payment**

Delete 1.8.5 and replace with the following

Payment for Common Excavation includes:

1. Unless noted in the Schedule of Quantities and Prices as removal in square meters, common excavation will be measured in cubic metres calculated from measurements taken by the Contract Administrator in the areas of excavation including removal and disposal of the unsuitable excavated native material, all grading and shaping of excavated slopes, creek bank, bed and slopes to design elevations.
2. Cross-sections will be taken after clearing and grubbing and after stripping of existing topsoil immediately prior to excavation of material to be incorporated into work.
3. Where determined by the Contract Administrator that truck box volume will be used to determine excavation quantities the volume per load shall be determined using 75% of the struck load quantity.
4. Contractor to provide truck slips detailing location type of common excavation, time loaded and location of dump site. The slips are to be given to Contract Administrator by the end of shift or Contract Administrator can deny quantities subsequently submitted.
5. Payment for on-site reuse includes grading, adjustment of moisture content and compaction of the reused material

Payment will be made at the respective unit prices bid in the Schedule of Quantities and Prices and will include all labour, and equipment required to complete the work, including offsite disposal. It is the responsibility of the contractor to locate and verify all utilities.

Delete 1.8.6 and replace with the following

Payment for removal, stockpiling and subsequent relocation from stockpile and restoration of existing boulders, spreading and grading of material anywhere on site as needed.

Payment will be made at the respective unit prices bid in the Schedule of Quantities and Prices and will include all labour, and equipment required to complete the work.

**2.0 PRODUCTS**

**2.2 Specified Materials**

Delete 2.2.1.3

Pit Run Sand

Delete 2.2.1.4

River Sand

Delete 2.2.2

**END OF SECTION**

**RIP RAP**

**1.0 GENERAL**

**1.4 Measurement and Payment**      Add to 1.4.1

Payment includes all labor, material and equipment required to complete the installation as shown on Contract Drawings and specified under this Section. Payment includes rip rap placement and keyed into place. Re-use of existing material on site will be incidental to payment under this Section.

**3.0 EXECUTION**

**3.2 Placement**      Add 3.2.8

Placement of riprap shall be done in a manner which maintains a well graded material and does not cause particular segregation, maintaining a minimum practical percentage of voids. Stones are not to be dropped from a height of more than 600mm to avoid damage / puncturing of underlying geotextile. The Contractor shall, at their own cost, repair or replace geotextile if the geotextile is deemed damaged / punctured due to placement of riprap, in the opinion of Contract Administrator.

The entire mass of the stones shall be placed in conformance with the grades and thickness shown on the plans. Material shall be placed to its minimum thickness in one operation in a manner to avoid displacement of underlying material. Placing material in layers or by dumping into chutes is not permitted. Rearranging of individual stones by small mechanical equipment may be required to the extent necessary to secure the results specified.

**END OF SECTION**



**1.0 GENERAL**

**1.5 Measurement and  
Payment**

Delete 1.4.1 and  
replace with the  
following

Payment includes supply and installation of growing medium and imported topsoil that is free from any noxious weeds, fungal growth, mushroom, and any contaminants. Grading shall include supply of materials, on-site handling, and placement to thickness specified, compaction, application of fertilizers and finish grading.

Payment for imported topsoil will be based on actual topsoil delivered and placed to the Place of Work based on truck weigh slips. Weigh slips must be submitted to the Contract Administrator on a daily basis. Weigh slips which are not submitted daily will not be accepted for payment.

**3.0 EXECUTION**

**3.7 Placing Growing  
Medium**

Add 3.4.6

Scarify soil, feather grades and remove noxious weeds from the edge of tree preservation areas.

**END OF SECTION**

**STORM SEWERS**

1.6	Measurement and Payment	Delete 1.6.1 and replace with the following	Payment for storm sewer will be made at the unit price bid for storm sewer (regardless of depth) consistent with pipe materials, diameters and backfill requirements shown on the Contract Drawings and described under individual payment items in the Schedule of Quantities.
		Delete 1.6.2 and replace with the following	Payment for storm sewers includes trench excavation, dewatering, removal and disposal of existing pipes, supply and installation of all pipe, wyes, cap, fittings and related materials, tie-ins to existing or new storm pipe or manhole, construction joints, bedding, import backfill, approved native backfill, granular base, granular Subbase, cleaning and flushing, testing (if applicable), videoing, surface restoration and all other work and materials necessary to complete installation as shown on Contract Drawings, as specified under this Section and as described in Clause 1.6.1; and  Native excavated material approved for re-use as trench backfill shall be at the sole discretion of the Contract Administrator. All cobbles greater than 150 mm diameter removed and disposed off-site and shall be granular in nature and free from organic materials. Native excavated material shall not be used as trench backfill where moisture content does not permit compaction to specified density. Where native excavated material is unacceptable for use as trench backfill, imported trench backfill shall be supplied, placed, and compacted to specified density.  Payment for supply and installation of temporary water passages, pumps, hoses, bypass or other approved means of handling waterflow in any watercourse as approved by Contract Administrator will be incidental to Section 01 57 01S, Cluase 1.6.1.  Measurement for storm sewer will be made horizontally along the ground from the start of new pipe to the terminus of the new pipe;  No payment will be made under this item carried out as part of operation of items described in other Sections.
2.0	PRODUCTS		
2.2	PVC Pipe, Mainline Smooth Wall	Delete 2.2.1 pipe size ranges and replace with the following	200 mm dia. – 375 mm dia. to ASTM D3034  450 mm dia. – 1,200 mm dia. to ASTM F679
2.3	PVC Pipe, Mainline Profile	Delete 2.3	
2.6	Service Connections	Delete 2.6.1 and replace with the following  Delete 2.6.8.1  Delete 2.6.8.2 and replace with the following  Add 2.6.8.3	Storm service connections to be PVC DR 28 150 mm diameter minimum or as specified on <i>Contract Drawings</i> .    Connections to PVC pipe to be made with a performed wye fitting where mainline pipe is 300 mm diameter or smaller. For connections to PVC mainline pipe larger than 300 mm diameter an insertable tee for PVC pipe is permitted.  Insertable tee fitting shall have a rubber collar which inserts into the mainline pipe to form a tight seal and shall have stainless steel band to secure the tee insert. The tee insert shall be a standard bell end with depth control lugs. The joint shall provide a minimum seal of 90 kPa on concrete and polyethylene pipe, and 190 kPa on PVC pipe.

STORM SEWERS

2.9	<b>Granular Pipe Bedding and Surround Material</b>	Delete 2.9.3	Pipe bedding shall be 19 mm clear crushed rock or as approved by the <i>Contract Administrator</i> and the City.
3.0	<b>EXECUTION</b>		
3.8	<b>Connections to Existing Mainline Pipe</b>	Delete 3.8.3 and replace with the following	<p>For new service connections to existing, smooth wall or profile, mainline sewers 300 mm and smaller, shall be made by removal of the section of the main and replacement with a preformed PVC wye fitting complete with stubs and double hub PVC couplings for PVC mains and approved shear band couplings for other mainline materials.</p> <p>For new service connections to existing mainline greater than 300 mm, use of insertable tee will be permitted.</p>
3.10	<b>Service Connection Installation</b>	Delete 3.10.3 replace with the following	Inspection chambers shall be provided on all storm service connections as per Standard Detail Drawing S7. If inspection chamber is located in driveway, lane, or paved surface, Series 37 Brooks concrete box with lid shall be installed as per Standard Detail Drawing S9.
3.12	<b>Inspection and Testing</b>		The contractor shall video inspect completed storm sewers under 900 mm in diameter and all service connections following completion of the installation. The video inspection report shall be in a form specified by the Contract Administrator and the City. Copies of the video DVD and written report shall be forwarded to the Contract Administrator and the City. Refer to Section 33 01 30.1 and 33 01 30.1S CCTV Inspection of Pipelines.
3.16	<b>Permanent Capping of Service Connections</b>	<p>Add 3.16.1</p> <p>Add 3.16.2</p>	<p>Permanent capping of existing storm sewer connections to be completed as per Coquitlam Standard Detail Drawing COQ-S18.</p> <p>A trenchless method of permanently capping a service may be required on an arterial road or on a road which has been paved within 5 years, as directed by the Manager.</p> <p>The trenchless technology used to cap the service must be approved by the Manager.</p>

END OF SECTION

**MANHOLES AND CATCHBASINS**

**1.0 GENERAL**

- |            |                                |   |  |                  |
|------------|--------------------------------|---|--|------------------|
| <b>1.1</b> | <b>Related Work</b>            | Add 1.1.6                                   | Hot Mix Asphalt Concrete Pavement  | Section 32 12 16 |
|            |                                | Add 1.1.7                                   | Portland Cement Concrete Paving  | Section 32 13 13 |
| <b>1.5</b> | <b>Measurement and Payment</b> | Delete 1.5.1 and replace with the following | <p>Lump sum payment includes all labor, material and equipment required to complete the installation as shown on Contract Drawings and specified under this Section. Payment includes subgrade preparation, compaction of base material, all in-situ concrete work, supply and installation of concrete base, lid suitable for H2O loading and as per City standard, metal frame, concrete lid, barrel and riser sections including ladder rungs, manhole benching, and all associated works as shown on the Contract Drawings and as described in Schedule of Quantities and Prices.</p> <p>Payment includes manhole preparation to accommodate tie-ins, excavation, disposal of surplus excavated material, base preparation, bedding and import backfill.</p> <p>No payment will be made under this item carried out as part of operation of items described in other Sections.</p> |                  |

**2.0 PRODUCTS**

- |            |                  |  |   |  |
|------------|------------------|--|---|--|
| <b>2.1</b> | <b>Materials</b> | Add 2.1.7.3                                  | Any frame and cover assembly creating a point load on the concrete riser rings will not be permitted. |  |
|            |                  | Delete 2.1.12 and replace with the following | Catchbasin lids manufactured to ASTM C478M  |  |
|            |                  | Delete 2.1.16.2                              |   |  |
|            |                  | Delete 2.1.17                                |   |  |

**3.0 EXECUTION**

- |            |                                |  |   |  |
|------------|--------------------------------|--|---|--|
| <b>3.1</b> | <b>Excavation and Backfill</b> | Add 3.1.2                                      | For manholes, when base gravels are complete, excavate for grade rings and manhole frame assembly. Do not disturb the compacted road base beyond the excavation requirement.                          |  |
| <b>3.3</b> | <b>Manhole Installation</b>    | Delete 3.3.12.2 and replace with the following | Allowable products are precast concrete risers and cast-in-place form system. Individual riser heights shall be 50mm, 75mm, or 100mm.   |  |
|            |                                | Delete 3.3.12.5 and replace with the following | Proper layer of grout between the spacers, covering the entire surface of the rings, should be utilized.  |  |
|            |                                | Delete 3.3.15 and replace with the following   | Install drop structures as shown on the contract drawings to Coquitlam Standard Detail Drawing COQ-S4 and Standard Detail Drawing S3. Maximum allowable inside ramp shall be 250 mm invert to invert. |  |
|            |                                | Delete 3.3.17 and replace with the following   | Ensure frames conform to design contour of pavement or existing surface. Manhole lids left raised in preparation for overlay paving   |  |

shall have a rubberized protector ring or asphalt ramp. The use of riser rings for adjusting manhole frames will not be permitted.

3.5      **Catchbasin  
Installation**      Delete 3.5.1 and  
replace with the  
following

Install catchbasins as shown on Coquitlam Standard Detail Drawings COQ-S11A, COQ-S11B and Standard Detail Drawing S11, to general standards and installation procedures described under 3.3 of this Section.

END OF SECTION

# ***Appendix A - Traffic Management Detail Specifications***

---

These supplementary Specifications must be read in conjunction with the Master Municipal Specifications contained in the Master Municipal Construction Documents (Platinum), Volume II, 2009.

<b>1.0</b>	<b>GENERAL</b>	
		.1 This Traffic Management detail specification refers to the Contractor's specific plans to identify project traffic risks affecting the <i>Work</i> , provide Traffic Control Plans, and to implement the traffic control for the safe passage of vehicles and pedestrian through the work zone.
1.1	Related Works	.1 Traffic Control, Vehicle Access and Parking MMCD Section 01 55 00S.
1.2	References	.1 WorkSafe BC, Occupational Health and Safety (OHS) Regulation, Section 18 – Traffic Control.  .2 B.C. Ministry of Transportation and Infrastructure (MOTI) Traffic Management Manual for Work on Roadways.
1.3	Project Requirements	.1 A Road and Sidewalk Closure Permit is required by Coquitlam for all work affecting traffic flow related to construction. A permit is required for each specific construction interference with traffic flow. The Road and Sidewalk Closure Permit Request form is attached as <b>Appendix 1</b> to this document. A digital copy of the Road and Sidewalk Closure Permit form can be obtained for use during the contract from the City's website at <a href="#">Road &amp; Sidewalk Closure Permit Application</a>  A Road and Sidewalk Closure Permit form application must be submitted to City's Traffic Operation Division 5 working days prior to start of work.
1.4	Measurement and Payment	.1 For this Contract, all work associated with Traffic Management Plan (TMP) and Traffic Control will be as shown in the Schedule of Quantities and Prices.
<b>2.0</b>	<b>PRODUCTS</b>	
2.1	Traffic Management Plan (TMP)	.1 The Contractor is required to assign a Traffic Manager for the Contract with the responsibility of preparing the Traffic Management Plan and the Traffic Control Plans, as well as the responsibility for continuing implementation of traffic control for the Work.  .2 The Traffic Management Plan (TMP) will consist of the following components: .1 Category identification through risks and project category assessment as per MOTI Traffic Management Manual for Work on Roadways; .2 Traffic Control Plans for individual stages of the construction; .3 Incident Management Plan for the response to an unplanned event and recording of incident information; .4 Category 3 TMP must be signed and sealed by a qualified Professional Engineer.

These supplementary Specifications must be read in conjunction with the Master Municipal Specifications contained in the Master Municipal Construction Documents (Platinum), Volume II, 2009.

- .3 Submission of the TMP is to be made to the *Contract Administrator* within five (5) days of the *Notice of Award* of the *Contract*, and must be approved by the *Contract Administrator* prior to start of the *Work*.
  - .4 Review of the TMP will be performed by the Contract Administrator. Comments for revisions to the TMP will be returned to the *Traffic Manager* for implementations.
  - .5 The Contractor shall comply with all the requirements of applicable laws, rules, regulations, codes and orders of the municipal and other appropriate authorities concerned with work on streets or highways and shall post proper notices and/or signals, and provide necessary barriers, guards, lights, flagmen or watchmen as may be necessary for proper maintenance of traffic and protection of persons and property from injury or damage. All costs involved in respect to the above requirements will be deemed to be included in the Contract Price.
  - .6 The Contractor, during the progress of the work, shall make adequate provision to accommodate the normal traffic along streets and highways immediately adjacent to or crossing the work so as to cause the minimum of inconvenience to the general public.
  - .7 The Contractor is required to maintain local traffic and driveway access during all stages of construction. This includes maintaining a 1.5m width walkway or pathway through the construction site for pedestrians.
  - .8 Where existing streets or roads are not available as detours, all traffic shall be permitted to pass through the work with as little inconvenience and delay as possible unless otherwise provided or authorized by the Contract Administrator. If half the street only is under improvement, the other half shall be conditioned and maintained as detour.
- 2.2 Incident Management and Reporting
- .1 The Contractor shall facilitate incident response vehicles and staff and move traffic safely and expeditiously through or around an incident on site and provide assistance to emergency response personnel as required. An incident includes, but is not limited to, motor vehicle accidents, emergency road repairs, disabled vehicles, and debris on the road. The immediate response to an emergency shall by necessity make use of available devices and equipment.
  - .2 If an incident occurs on site, the Contractor will be required to submit a report to the Contract Administrator documenting details of the incident including event, location, date, time, action taken, duration and restoration of site.
- 2.3 Traffic Control Plans
- .1 The Contractor shall designate a qualified Traffic Control Supervisor for the works, per the requirements of WCB regulations Section 18.

These supplementary Specifications must be read in conjunction with the Master Municipal Specifications contained in the Master Municipal Construction Documents (Platinum), Volume II, 2009.



The designated Traffic Control Supervisor may be the same individual that is designated as the Traffic Manager, or may be a separate individual qualified for the responsibilities of this function.

- .2 The Contractor shall prepare weekly the anticipated traffic control activities, locations, and durations for the upcoming week.
- .3 Permissible delays shall only be considered outside Peak Hours. Permissible delays are categorized as follows:
  - a) Minor Delays - Less than two (2) minutes in duration; for occasional interruption due to construction activities. These delays shall be coordinated with available breaks in the traffic flow.
  - b) Major Delays - Maximum five (5) minutes in duration; for occasional interruption of traffic for construction activities if traffic volumes permit.
- .4 The Contractor is responsible for ensuring that the flow of traffic is unimpeded by construction-related activities.

### **3.0 EXECUTION**

#### **3.1 Traffic Control Plan**

- .1 A copy of the approved current Traffic Plan and Road and Sidewalk Closure Permit must be held on site by both the Site Superintendent as well as the person/company responsible for the traffic control implementation.
- .2 Failure to produce a valid approved Traffic Plan on site, or having work not follow the Traffic Control Plan will result in immediate shut-down of the work. The Contractor will be required to safely restore facility conditions to allow traffic flow at their expense. The Contractor must take all steps to acquire an approved Traffic control Plan before work can re-start on site. No claim will be accepted by the Owner for costs associated with this work shut-down.

#### **3.2 Traffic Control Personnel & Equipment**

- .1 The Contractor shall supply all necessary traffic control devices required to perform traffic control services for the project. Signs and traffic control devices not applying to existing conditions shall be removed. Where operations are carried out in stages, only those traffic control devices that apply to the current stage are to be left in place.
- .2 There must be sufficient Traffic Control Persons (TCPs) on site to appropriately and safely direct traffic in all sections of the Work.

#### **3.3 Signage**

Supply, installation, maintenance and removal of all works-related signs shall be the responsibility of the Contractor. The location and type of each sign shall be indicated on the approved Traffic Control Plan, for each stage of the works.

Traffic control signs and devices must be positioned and used as specified in the Traffic Control Plan and signs and devices must be located so as to allow traffic to move by or through the work area in a controlled manner and, if necessary, to come to a controlled stop with due regard for the prevailing weather and road conditions.

Signs shall be checked daily for legibility, damage, suitability and location. Signs and delineators shall be cleaned as frequently as necessary to ensure full legibility and reflectance.

3.4 Detours

Any proposed detours must be approved by the Contract Administrator and conducted in accordance with the approved Traffic Plan and the Traffic Control Manual for Work on Roadways.

3.5 Abrupt Changes in  
Surface Elevations

The Contractor shall minimize any abrupt changes in roadway elevation left exposed to traffic during both working and non-working hours.

A wedge of asphalt must be used as a transition to vertical differences in travelled areas and have a slope of 4:1 or less.

3.6 Cyclist and Pedestrian  
Access

The Contractor shall make provision for pedestrians, wheel chairs and bicycles to have safe access across the work zone at all times. If this cannot be readily accommodated then acceptable detours and appropriate signs shall be provided.

3.7 Temporary Pavement  
Markings

The Contractor shall be responsible for the application and removal of all temporary pavement markings and reflective devices.

All temporary markings must be removed after installation of permanent markings.

**4.0 TRAFFIC RESTRICTIONS**

4.1 Road and Sidewalk  
Closure Permits

.1 One lane of traffic must be maintained at all times during any allowed lane closure times.

.2 A Road and Sidewalk Closure Permit is required for each instance of closure and will be valid for a maximum period of one (1) week and, if still necessary, re-submittal of a Road and Sidewalk Closure Request is required. The \$50 permit fee is waived on this project.

A copy of the approved Road and Sidewalk Closure Permit must be held on site by both the Site Superintendent and the person/company responsible for the traffic control implementation.

.3 Total Road Closure Is Not Permitted

.4 Detours will only be permitted as approved by the Contract Administrator and must have a complete Traffic Control Plan indicating detour route, signing, and duration. Detours will not be

These supplementary Specifications must be read in conjunction with the Master Municipal Specifications contained in the Master Municipal Construction Documents (Platinum), Volume II, 2009.

allowed without sufficient lead time for commercial and retail operation to react appropriately to detour information provided to them.

4.2 Lane Closure  
Restrictions

- .1 For each of the road sections affected:
- Road and Sidewalk Closures will be reviewed for appropriateness during the allowable hours of work.
  - Minimum single lane traffic is required at all times
  - Access to properties to be maintained
  - Sufficient Traffic Control Persons are required for each Road and Sidewalk Closure (or any work activities), including side street intersections, to safely guide traffic through the work site

4.3 Hours of Work

The hours of work shall be from **0700 h to 1900 h** inclusive Monday to Friday and **0900 h to 1800 h** inclusive Saturdays. The Contractor must schedule his work within these hours or obtain written authorization from the Contract Administrator to vary said hours.

**5.0 CONSTRUCTION  
OPERATIONS**

5.1 Truck Routes

- .1 The Contractor is restricted to the City's designated Truck Routes. The current Truck Route Map is available on the City's website at [www.coquitlam.ca](http://www.coquitlam.ca) and can be found under **Residents, Transit & Transportation, Trucking Routes**.

5.2 Road Specific  
Considerations

- .1 Ensure that Traffic Management Plan accommodates businesses and residences during construction activities.

5.3 Work stoppage due to  
traffic

The City will not control or direct traffic control activities of the Contractor, but may require an immediate stop to any work where, in the sole opinion of the Contract Administrator, the provided traffic management plan is ineffective.

5.4 Construction Activity  
and Signage

The Contractor will be responsible to place other construction information signs as required to inform the public of construction activities, and ensure safe travel through the work site.

5.5 Temporary Traffic  
Control Signal

Contractor must provide a Continuously Operating Temporary Traffic Control Signal during non-working hours. Contractor must have the timing signal programmed to properly accommodate the vehicular traffic volume to be provided by the Contract Administrator.

5.6 Changeable Message  
Sign (CMS) Board

The following locations will require Changeable Message Signs (CMS) for the duration of the project:

1. Eastbound on Dewdney Trunk Road
2. Westbound on Dewdney Trunk Road


Exact locations to be discussed at the pre-construction meeting. These signs are required to be in service at least five **normal work days prior to construction start** to provide advance warning to motorists. CMS must be able to handle minimum of three lines per page/screen.

5.7 Construction Zone Information Signs

The Contractor is required to provide, one week prior to start of work, stationary signs to inform traffic of existing and anticipated conditions.

Ensure that signs and locations are addressed in the Traffic Management Plan. Signs are to be located at least 3m away from any travelled roadway edge and 0.6m away from sidewalk or travelled shoulder edge with minimum head clearance of 2m. All signs are to be removed at the end of the construction period on each location.

**Construction Zone Information Signs to follow specifications below:**

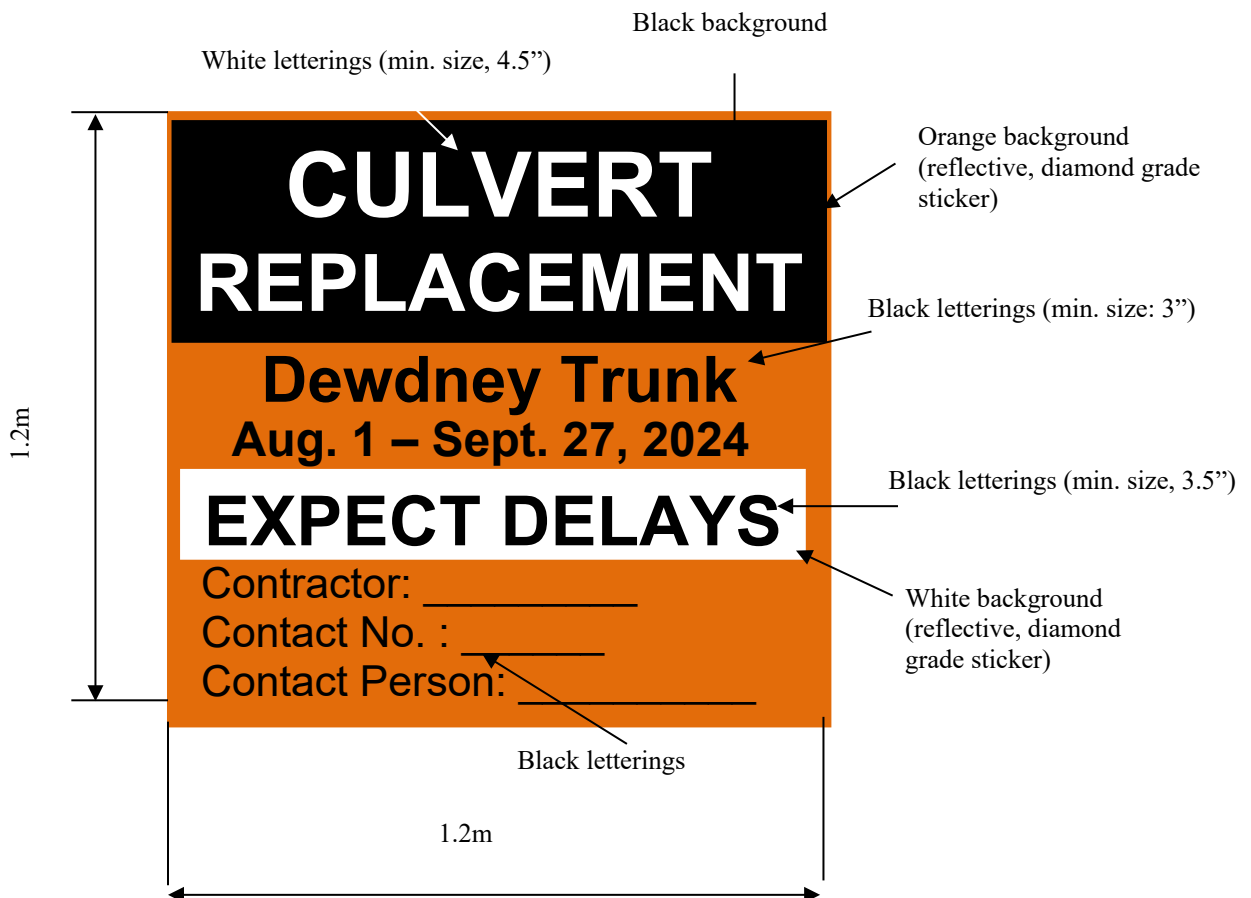

These supplementary Specifications must be read in conjunction with the Master Municipal Specifications contained in the Master Municipal Construction Documents (Platinum), Volume II, 2009.



**Traffic Control Plan\*:**

- (a) Traffic Management Manual for Work on Roadways Figure Number \_\_\_\_\_, or  
(b) A Traffic Control Plan (*attach separately*) indicating signage, taper lengths, direction of traffic, work area, and north arrow

**Traffic control persons (flag persons) on duty?** ☐ Yes ☐ No If yes, specify how many: \_\_\_\_\_

**\*Important Notice:** All operations within the road right-of-way must comply with Worksafe BC regulations and BC Ministry of Transportation standards for work on roadways.

**Application Checklist**

- ☐ Permit Fee
- ☐ Prime Contractor Designation Letter
- ☐ City of Coquitlam Certificate of Insurance
- ☐ Traffic Control Plan or Traffic Management Manual for Work on Roadways Figure Number \_\_\_\_\_
- ☐ Coast Mountain Bus Company (Phone: 778-593-5774 | Email: [special.events@coastmountainbus.com](mailto:special.events@coastmountainbus.com)) contacted regarding impact to bus routes and bus stops
- ☐ City of Coquitlam Environmental Services Group (Phone: 604-927-3500 | Email: [wastereduction@coquitlam.ca](mailto:wastereduction@coquitlam.ca)) contacted regarding impact to garbage/recycling routes and pick up

I **HEREBY AGREE** to the terms stipulated herein and further agree to indemnify and save harmless the City against any and all claims, actions, or expenses whatsoever or by whomsoever brought against the City by the reason of the City granting us this Road and Sidewalk Closure Permit. I further agree to accept responsibility to ensure proper situation control and street sweeping for the duration of the road or sidewalk obstruction.

\_\_\_\_\_  
Date

\_\_\_\_\_  
Applicant Signature

**Office Use Only PERMIT STATUS**

- |   |  |  |
|---|--|--|
| <input type="checkbox"/> Permit Fee           | <input type="checkbox"/> Prime Contractor Letter | <input type="checkbox"/> Certificate of Insurance                |
| <input type="checkbox"/> Traffic Control Plan | <input type="checkbox"/> Impact to bus service   | <input type="checkbox"/> Impact garbage and recycling collection |

☐ Request is denied for the following reason(s): \_\_\_\_\_

☐ Request is approved with the following change(s): \_\_\_\_\_

☐ Request is approved as submitted

\_\_\_\_\_  
Date

\_\_\_\_\_  
Traffic Technologist or Designate

***Appendix B -  
Construction Mitigation Plan***

## Construction Mitigation Plan (CMP)

(To be read with MMCD Platinum 2009 Edition Specifications and Contract's Supplementary Specifications, Section 01 57 01)

This CMP and the Environmental Notes found in cover page of Contract Drawings outlines the minimum mandatory measures that the Contractor must follow during construction.

### Work Site Location: Dewdney Trunk Road Culvert at Pinnacle Creek

Pinnacle Creek at Dewdney Trunk Road has a classification as a red coded watercourse inhabited by Salmonids and/or rare or endangered species year-round.

Construction activities will occur in isolation of any watercourse flow. Bypass must be installed as appropriate following DFO/FLNRO guidelines for proper flow control prior to start of any construction.

#### I. Scheduling & Environmental Monitoring

- Proposed work will be scheduled for completion within the Fisheries Window of August 1 to September 15, 2024, unless otherwise authorized by DFO and **will be subject to approval by Ministry**.
- Fish salvage (if needed) will be undertaken as required from areas proposed for flow isolation to be done by an Environmental Monitor (EM) designated by the City.
- An environmental monitor (EM) independent of the construction contractor will be designated by the City to act as EM for the project.
- The EM will provide monitoring of environmentally sensitive construction works to ensure works proceed as per DFO requirements.
- The EM will also monitor the implementation and effectiveness of erosion and sediment control (ESC) measures deployed by the contractor.
- All work which involves heavy machinery that is disturbing earth material must be suspended during substantial rainfall (substantial rainfall will be determined by the EM after a review of weather conditions and existing ground saturation).
- If the proposed works are not conducted in a manner compliant with this CMP or the environmental regulatory approvals, then the EM is required to inform the Contact Administrator (CA), Engineering Inspector, and the contractor of concerns relating to this CMP. The contractor will immediately address deficiencies so that works are compliant with the intent of the CMP.
- The Contractor shall keep on site at all times a copy of this CMP and any environmental approvals required by DFO/Ministry.

#### II. Riparian Zone

- Any planting requirements will be as listed in the Contract Documents and Drawing or as specified in this CMP. Specific planting locations will be determined by the EM on site.
- Disturbed areas are to be revegetated with the prescribed grass seed mix and then covered with mulch or straw to prevent erosion and to help seeds germinate.
- All efforts will be made to leave undisturbed native vegetation where possible. Stream banks and ditches are to be restored to their original or better condition if any disturbance occurs.
- The Contractor shall restore all disturbed areas to their original condition or better after construction is completed.



- **Planting Zone**

- ❖ **Seeding :**

- Broadcast seed to all exposed soil in the riparian zone with coastal reclamation mixture at 75kg/ha or approved equivalent by EM.

### **III. Erosion and Sediment Control (ESC) measures**

- Effective erosion and sediment control measures shall be installed by the Contractor prior to any commencement of work.
- These measures are to be inspected by the EM regularly during the course of construction. Necessary repairs/corrections will be made by the Contractor immediately if ESC is compromised or becomes ineffective or as determined by the EM.
- Any debris removed from the work site are to be stabilized to prevent them from entering the watercourse (i.e. covering spoil piles with secured tarps, covering exposed soils with straw, etc.).
- For ESC to be effective on this site the Contractor will follow conditions of this CMP and important ESC measures that will meet or exceed the standards outlined in the DFO "Land Development Guidelines for the protection of Aquatic Habitat" and/or directives provided by agency approvals.
- All works will be conducted by the Contractor in a manner that will prevent the release of sediment or sediment laden waters to storm sewers and swales draining to fish habitat.
- Construction and excavation wastes, overburden, soil or any substance deleterious to aquatic life will be disposed of or placed in a manner that will prevent their entry in to any storm sewer system. All rock or other material will be free of fine sediment and contaminants
- All disturbed slopes and ground surfaces that may contribute sediment-laden water during precipitation events must be stabilized through application of organic (i.e. straw) or inorganic (i.e. plastic) mulches over the course of the project.
- Work will be pursued to completion as quickly as possible once started.
- Prior to commencement of the works the contractor must obtain sufficient quantities of silt fence, straw bales, grass seed mix, sandbags, erosion control blanketing, mulch etc. necessary to stabilize disturbed ground. These materials must be onsite, available for inspection and installation prior to the commencement of any ground disturbance.

### **IV. Operation of Machinery**

- Machinery is to arrive on site in good working condition, power washed and free of leaks, excess oil and grease. No fuels, lubricants or any deleterious substance will be permitted to any watercourse at any given time.
- No machine refueling within 30m of any watercourse will be allowed.

### **V. Spills**

- A spill containment kit must be readily accessible to each construction equipment on site in the event of release of a deleterious substance to the environment. Any spill of a deleterious substance that enters the watercourse will be immediately reported to the Provincial Emergency Program 24hour phone line at 1-800-663-3456.
- The spill kit must be onsite ready for inspection at commencement of construction. Construction will not be allowed to commence if proper spill kit is not available on site.